



NEHRU COLLEGE OF ENGINEERING AND RESEARCH CENTRE
(NAAC Accredited)
(Approved by AICTE, Affiliated to APJ Abdul Kalam Technological University, Kerala)



DEPARTMENT OF COMPUTER SCIENCE AND ENGINEERING

COURSE MATERIALS



PHT100 ENGINEERING PHYSICS (CIRCUIT-BRANCH)

VISION OF THE INSTITUTION

To mould true citizens who are millennium leaders and catalysts of change through excellence in education.

MISSION OF THE INSTITUTION

NCERC is committed to transform itself into a center of excellence in Learning and Research in Engineering and Frontier Technology and to impart quality education to mould technically competent citizens with moral integrity, social commitment and ethical values.

We intend to facilitate our students to assimilate the latest technological know-how and to imbibe discipline, culture and spiritually, and to mould them in to technological giants, dedicated research scientists and intellectual leaders of the country who can spread the beams of light and happiness among the poor and the underprivileged.

ABOUT DEPARTMENT

- ◆ Established in: 2002
- ◆ Course offered : B.Tech in Computer Science and Engineering

M.Tech in Computer Science and Engineering

M.Tech in Cyber Security

- ◆ Approved by AICTE New Delhi and Accredited by NAAC
- ◆ Affiliated to the University of A P J Abdul Kalam Technological University.

DEPARTMENT VISION

Producing Highly Competent, Innovative and Ethical Computer Science and Engineering Professionals to facilitate continuous technological advancement.

DEPARTMENT MISSION

1. To Impart Quality Education by creative Teaching Learning Process
2. To Promote cutting-edge Research and Development Process to solve real world problems with emerging technologies.
3. To Inculcate Entrepreneurship Skills among Students.
4. To cultivate Moral and Ethical Values in their Profession.
- 5.

PROGRAMME EDUCATIONAL OBJECTIVES

- PEO1:** Graduates will be able to Work and Contribute in the domains of Computer Science and Engineering through lifelong learning.
- PEO2:** Graduates will be able to Analyse, design and development of novel Software Packages, Web Services, System Tools and Components as per needs and specifications.
- PEO3:** Graduates will be able to demonstrate their ability to adapt to a rapidly changing environment by learning and applying new technologies.
- PEO4:** Graduates will be able to adopt ethical attitudes, exhibit effective communication skills, Team work and leadership qualities.

PROGRAM OUTCOMES (POS)

Engineering Graduates will be able to:

1. **Engineering knowledge:** Apply the knowledge of mathematics, science, engineering fundamentals, and an engineering specialization to the solution of complex engineering problems.
2. **Problem analysis:** Identify, formulate, review research literature, and analyze complex engineering problems reaching substantiated conclusions using first

principles of mathematics, natural sciences, and engineering sciences.

3. **Design/development of solutions:** Design solutions for complex engineering problems and design system components or processes that meet the specified needs with appropriate consideration for the public health and safety, and the cultural, societal, and environmental considerations.
4. **Conduct investigations of complex problems:** Use research-based knowledge and research methods including design of experiments, analysis and interpretation of data, and synthesis of the information to provide valid conclusions.
5. **Modern tool usage:** Create, select, and apply appropriate techniques, resources, and modern engineering and IT tools including prediction and modeling to complex engineering activities with an understanding of the limitations.
6. **The engineer and society:** Apply reasoning informed by the contextual knowledge to assess societal, health, safety, legal and cultural issues and the consequent responsibilities relevant to the professional engineering practice.
7. **Environment and sustainability:** Understand the impact of the professional engineering solutions in societal and environmental contexts, and demonstrate the knowledge of, and need for sustainable development.
8. **Ethics:** Apply ethical principles and commit to professional ethics and responsibilities and norms of the engineering practice.
9. **Individual and team work:** Function effectively as an individual, and as a member or leader in diverse teams, and in multidisciplinary settings.
10. **Communication:** Communicate effectively on complex engineering activities with the engineering community and with society at large, such as, being able to comprehend and write effective reports and design documentation, make effective presentations, and give and receive clear instructions.
11. **Project management and finance:** Demonstrate knowledge and understanding of the engineering and management principles and apply these to one's own work, as a member and leader in a team, to manage projects and in multidisciplinary environments.
12. **Life-long learning:** Recognize the need for, and have the preparation and ability to engage in independent and life-long learning in the broadest context of technological change.

PROGRAM SPECIFIC OUTCOMES (PSO)

PSO1: Ability to Formulate and Simulate Innovative Ideas to provide software solutions for Real-time Problems and to investigate for its future scope.

PSO2: Ability to learn and apply various methodologies for facilitating development of high quality System Software Tools and Efficient Web Design Models with a focus on performance optimization.

PSO3: Ability to inculcate the Knowledge for developing Codes and integrating hardware/software products in the domains of Big Data Analytics, Web Applications and Mobile Apps to create innovative career path and for the socially relevant issues.

PHT 100	ENGINEERING PHYSICS A (FOR CIRCUIT BRANCHES)	CATEGORY	L	T	P	CREDIT	YEAR OF INTRODUCTION
		BSC	3	1	0	4	2019

Preamble: The aim of the Engineering Physics Program is to offer students a solid background in the fundamentals of Physics and to impart that knowledge in engineering disciplines. The program is designed to develop scientific attitudes and enable the students to correlate the concepts of Physics with the core programmes

Prerequisite: Higher secondary level Physics, Mathematical course on vector calculus, differential equations and linear algebra

Course Outcomes: After the completion of the course the student will be able to

CO 1	Compute the quantitative aspects of waves and oscillations in engineering systems.
CO 2	Apply the interaction of light with matter through interference, diffraction and identify these phenomena in different natural optical processes and optical instruments.
CO 3	Analyze the behaviour of matter in the atomic and subatomic level through the principles of quantum mechanics to perceive the microscopic processes in electronic devices.
CO 4	Classify the properties of magnetic materials and apply vector calculus to static magnetic fields and use Maxwell's equations to diverse engineering problems
CO 5	Analyze the principles behind various superconducting applications, explain the working of solid state lighting devices and fibre optic communication system

Mapping of course outcomes with program outcomes

	PO 1	PO 2	PO 3	PO 4	PO 5	PO 6	PO 7	PO 8	PO 9	PO 10	PO 11	PO 12
CO 1	3	2						1	2			1
CO 2	3	2						1	2			1
CO 3	3	2						1	2			1
CO 4	3	1						1	2			1
CO 5	3	1						1	2			1

Assessment Pattern

Bloom's Category	Continuous Assessment Tests		End Semester Examination (Marks)
	Test 1 (Marks)	Test 2 (Marks)	
Remember	15	15	30
Understand	25	25	50
Apply	10	10	20

Analyse			
Evaluate			
Create			

Mark distribution

Total Marks	CIE marks	ESE marks	ESE Duration
150	50	100	3 hours

Continuous Internal Evaluation Pattern:

Attendance	: 10 marks
Continuous Assessment Test (2 numbers)	: 25 marks
Assignment/Quiz/Course project	: 15 marks

End Semester Examination Pattern: There will be two parts; Part A and Part B. Part A contain 10 questions with 2 questions from each module, having 3 marks for each question. Students should answer all questions. Part B contains 2 questions from each module of which student should answer any one. Each question can have maximum 2 sub-divisions and carry 14 marks.

Course Level Assessment Questions

Course Outcome 1 (CO1):

1. Explain the effect of damping force on oscillators.
2. Distinguish between transverse and longitudinal waves.
3. (a) Derive an expression for the fundamental frequency of transverse vibration in a stretched string.
(b) Calculate the fundamental frequency of a string of length 2 m weighing 6 g kept stretched by a load of 600 kg.

Course Outcome 2 (CO2):

1. Explain colours in thin films.
2. Distinguish between Fresnel and Fraunhofer diffraction.
3. (a) Explain the formation of Newton's rings and obtain the expression for radii of bright and dark rings in reflected system. Also explain how it is used to determine the wavelength of a monochromatic source of light.
(b) A liquid of refractive index μ is introduced between the lens and glass plate.

What happens to the fringe system? Justify your answer.

Course Outcome 3 (CO3):

1. Give the physical significance of wave function ?
2. What are excitons ?
3. (a) Solve Schrodinger equation for a particle in a one dimensional box and obtain its energy eigen values and normalised wave functions.

(b) Calculate the first three energy values of an electron in a one dimensional box of width 1 \AA in electron volt.

Course Outcome 4 (CO4):

1. Compare displacement current and conduction current.
2. Mention any four properties of ferro magnetic materials.
3. (a) Starting from Maxwell's equations, derive the free space electromagnetic wave equation and show that velocity of electromagnetic wave is $1/(\mu_0 \epsilon_0)^{1/2}$

(b) An electromagnetic wave is described by $E = 100 \exp 8\pi i [10^{14} t - (10^6 z / 3)]$ V/m. Find the direction of propagation of the wave, speed of the wave and magnetic flux density in the wave.

Course Outcome 5 (CO5):

1. Explain the working of a solar cell.
2. Distinguish between Type I and Type II super conductors.
3. (a) Define numerical aperture and derive an expression for it.

(b) Explain the working of intensity modulated fibre optic sensor.

Model Question paper

QP CODE:

PAGES:3

Reg No: _____

Name : _____

**APJ ABDUL KALAM TECHNOLOGICAL UNIVERSITY FIRST SEMESTER B.TECH DEGREE EXAMINATION,
MONTH & YEAR**

Course Code: PHT 100

Course Name: Engineering Physics A

Max. Marks: 100

Duration: 3 Hours

PART A

Answer all Questions. Each question carries 3 Marks

1. Compare electrical and mechanical oscillators
2. Distinguish between longitudinal and transverse waves
3. Write a short note on antireflection coating.
4. Diffraction of light is not as evident in daily experience as that of sound waves. Give reason.
5. State and explain Heisenberg's Uncertainty principle. With the help of it explain natural line broadening.
6. Explain surface to volume ratio of nanomaterials.
7. State Faraday's laws of electromagnetic induction.
8. Compare displacement current and conduction current
9. List four important applications of superconductors.
10. Give the working principle of LED. (10x3=30)

PART B

Answer any one full question from each module. Each question carries 14 Marks

Module 1

11. (a) Derive the differential equation of damped harmonic oscillator and deduce its solution. Discuss the cases of over damped, critically damped and under damped cases. (10)
- (b) The frequency of a tuning fork is 500 Hz and its Q factor is 7×10^4 . Find the relaxation time. Also calculate the time after which its energy becomes 1/10 of its initial undamped value. (4)
12. (a) Derive an expression for the velocity of propagation of a transverse wave in a stretched string. Deduce laws of transverse vibrations. (10)
- (b) The equation of transverse vibration of a stretched string is given by $y = 0.00327 \sin(72.1x - 2.72t)$ m, in which the numerical constants are in S.I units. Evaluate (i) Amplitude (ii) Wavelength (iii) Frequency and (iv) Velocity of the wave. (4)

Module 2

- 13.(a) Explain the formation of Newton's rings and show that the radius of dark ring is proportional to the square root of natural numbers. How can we use Newton's rings experiment to determine the refractive index of a liquid. (10)
- (b) Two pieces of plane glass are placed together with a piece of paper between two at one end. Find the angle of the wedge in seconds if the film is viewed with a monochromatic light of wavelength 4800 \AA . Given $\beta = 0.0555 \text{ cm}$. (4)
14. (a) Explain the diffraction due to a plane transmission grating. Obtain the grating equation. (10)
- (b) A grating has 6000 lines per cm. Find the angular separation of the two yellow lines of mercury of wavelengths 577 nm and 579 nm in the second order. (4)

Module 3

- 15.(a) Derive time dependent and independent Schrodinger equations. (10)
- (b) An electron is confined to one dimensional potential box of length 2 \AA . Calculate the energies corresponding to the first and second quantum states in eV. (4)
- 16.(a) Classify nanomaterials based on dimensionality of quantum confinement and explain the following nanostructures. (i) nano sheets (ii) nano wires (iii) quantum dots. (10)
- (b) Find the de Broglie wavelength of electron whose kinetic energy is 15 eV. (4)

Module 4

- 17.(a) State Poynting's Theorem. Calculate the value of Poynting vector at the surface of the sun if the power radiated by the sun is $3.8 \times 10^{26} \text{ W}$ and its radius is $7 \times 10^8 \text{ m}$. (5)

(b) Distinguish between paramagnetic, diamagnetic and ferromagnetic materials. (9)

18.(a) Starting from Maxwell's Equations, derive electromagnetic wave equations in free space.
(10)

(b) If the magnitude of \mathbf{H} in a plane wave is 1 A/m, find the magnitude of \mathbf{E} in free space. (4)

Module 5

19.(a) Show that superconductors are perfect diamagnets. Distinguish between Type I and Type II superconductors with suitable examples. (10)

(b) Write a short note on high temperature superconductors. (4) 20.(a)

Define numerical aperture of an optic fibre and derive an expression for the NA of a step index fibre with a neat diagram. (10)

(b) Calculate the numerical aperture and acceptance angle of a fibre with a core refractive index of 1.54 and a cladding refractive index of 1.50 when the fibre is inside water of refractive index 1.33. (4) (14x5=70)

Syllabus

ENGINEERING PHYSICS A (FOR CIRCUIT BRANCHES)

Module 1

Oscillations and Waves

Harmonic oscillations, Damped harmonic motion-Derivation of differential equation and its solution, Over damped, Critically damped and Under damped Cases, Quality factor-Expression, Forced oscillations-Differential Equation-Derivation of expressions for amplitude and phase of forced oscillations, Amplitude Resonance-Expression for Resonant frequency, Quality factor and Sharpness of Resonance, Electrical analogy of mechanical oscillators

Wave motion- Derivation of one dimensional wave equation and its solution, Three dimensional wave equation and its solution (no derivation), Distinction between transverse and longitudinal waves, Transverse vibration in a stretched string, Statement of laws of vibration

Module 2

Wave Optics

Interference of light-Principle of superposition of waves, Theory of thin films - Cosine law (Reflected system), Derivation of the conditions of constructive and destructive Interference, Interference due to wedge shaped films -Determination of thickness and test for optical planeness, Newton's rings - Measurement of wavelength and refractive index, Antireflection coatings

Diffraction of light, Fresnel and Fraunhofer classes of diffraction, Diffraction grating-Grating equation, Rayleigh criterion for limit of resolution, Resolving and Dispersive power of a grating with expression (no derivation)

Module 3

Quantum Mechanics & Nanotechnology

Introduction for the need of Quantum mechanics, Wave nature of Particles, Uncertainty principle, Applications-Absence of electrons inside a nucleus and Natural line broadening mechanism, Formulation of time dependent and independent Schrodinger wave equations-Physical meaning of wave function, Particle in a one dimensional box- Derivation for normalised wave function and energy eigen values, Quantum Mechanical Tunnelling (Qualitative)

Introduction to nanoscience and technology, Increase in surface to volume ratio for nanomaterials, Quantum confinement in one dimension, two dimension and three dimension- Nano sheets, Nano wires and Quantum dots, Properties of nanomaterials-mechanical, electrical and optical, Applications of nanotechnology (qualitative ideas)

Module 4

Magnetism & Electro Magnetic Theory

Magnetic field and Magnetic flux density, Gauss's law for Magnetic flux density, Ampere's Circuital law, Faraday's law in terms of EMF produced by changing magnetic flux, Magnetic permeability and susceptibility, Classification of magnetic materials-para, dia and ferromagnetic materials

Fundamentals of vector calculus, concept of divergence, gradient and curl along with physical significance, Line, Surface and Volume integrals, Gauss divergence theorem & Stokes' theorem, Equation of continuity, Derivation of Maxwell's equations in vacuum, Comparison of displacement current with conduction current. Electromagnetic waves, Velocity of Electromagnetic waves in free space, Flow of energy and Poynting's vector (no derivation)

Module 5

Superconductivity & Photonics

Superconducting phenomena, Meissner effect and perfect diamagnetism, Types of superconductors- Type I and Type II, BCS Theory (Qualitative), High temperature superconductors-Applications of super conductivity

Introduction to photonics-Photonic devices-Light Emitting Diode, Photo detectors -Junction and PIN photodiodes, Solar cells-I-V Characteristics, Optic fibre-Principle of propagation of light, Types of fibres-Step index and Graded index fibres, Numerical aperture -Derivation, Fibre optic communication system (block diagram), Industrial, Medical and Technological applications of optical fibre, Fibre optic sensors-Intensity Modulated and Phase modulated sensors.

Text Books

1. M.N.Avadhanulu, P.G.Kshirsagar,TVS Arun Murthy "A Text book of Engineering Physics", S.Chand &Co., Revised Edition 2019
2. H.K.Malik , A.K. Singh, "Engineering Physics" McGraw Hill Education, Second Edition 2017

Reference Books

1. Arthur Beiser, "Concepts of Modern Physics ", Tata McGraw Hill Publications, 6th Edition 2003
2. D.K. Bhattacharya, Poonam Tandon, "Engineering Physics", Oxford University Press, 2015
3. Md.N.Khan & S.Panigrahi "Principles of Engineering Physics 1&2", Cambridge University Press, 2016
4. Aruldas G., "Engineering Physics", PHI Pvt. Ltd., 2015
5. Ajoy Ghatak, "Optics", Mc Graw Hill Education, Sixth Edition, 2017
6. T. Pradeep, "Nano:The Essentials", McGraw Hill India Ltd, 2007
7. Halliday, Resnick, Walker, "Fundamentals of Physics", John Wiley & Sons.Inc, 2001
8. David J Griffiths, "Introduction to Electrodynamics", Addison-Wesley publishing, 3rd Edition, 1999
9. Premlet B., "Advanced Engineering Physics", Phasor Books,10th edition,2017
10. I. Dominic and. A. Nahari, "A Text Book of Engineering physics", Owl Books Publishers, Revised edition, 2016

Course Contents and Lecture Schedule

No	Topic	No. of Lectures
1	Oscillations and Waves (9 hours)	
1.1	Harmonic oscillations, Damped harmonic motion-Derivation of differential equation and its solution, Over damped, Critically damped and Under damped Cases, Quality factor-Expression	2 hrs
1.2	Forced oscillations-Differential Equation-Derivation of expressions for amplitude and phase of forced oscillations, Amplitude Resonance-Expression for Resonant frequency, Quality factor and Sharpness of Resonance, Electrical analogy of mechanical oscillators	3hrs
1.3	Wave motion- Derivation of one dimensional wave equation and its solution, Three dimensional wave equation and its solution (no derivation)	2 hrs
1.4	Distinction between transverse and longitudinal waves. Transverse vibration in a stretched string, Statement of laws of vibration	2 hrs
2	Wave Optics (9 hours)	
2.1	Interference of light-Principle of superposition of waves, Theory of thin films - Cosine law (Reflected system), Derivation of the conditions of constructive and destructive Interference	2 hrs
2.2	Interference due to wedge shaped films -Determination of thickness and test for optical planeness, Newton's rings - Measurement of wavelength and refractive index, Antireflection coatings	
2.3	Diffraction of light, Fresnel and Fraunhofer classes of diffraction, Diffraction grating-Grating equation	2 hrs
2.4	Rayleigh criterion for limit of resolution, Resolving and Dispersive power of a grating with expression (no derivation)	1 hr
3	Quantum Mechanics & Nanotechnology (9hours)	
3.1	Introduction for the need of Quantum mechanics, Wave nature of Particles, Uncertainty principle, Applications-Absence of electrons inside a nucleus and Natural line broadening mechanism	2 hrs
3.2	Formulation of time dependent and independent Schrodinger wave equations-Physical Meaning of wave function, Particle in a one dimensional box- Derivation for normalised wave function and energy eigen values, Quantum Mechanical Tunnelling (Qualitative)	4 hrs
3.3	Introduction to nanoscience and technology, Increase in surface to volume ratio for nanomaterials, Quantum confinement in one dimension, two dimension and three dimension-Nano sheets, Nano wires and Quantum dots	2 hrs
3.4	Properties of nanomaterials-mechanical, electrical and optical Applications of nanotechnology (qualitative ideas)	1 hr
4	Magnetism & Electro Magnetic Theory (9 hours)	
4.1	Magnetic field and Magnetic flux density, Gauss's law for Magnetic flux	2 hrs

	density, Ampere's Circuital law, Faraday's law in terms of EMF produced by changing magnetic flux	
4.2	Explanation for Magnetic permeability and susceptibility Classification of magnetic materials- para, dia and ferromagnetic materials	1 hr
4.3	Fundamentals of vector calculus, concept of divergence, gradient and curl along with physical significance, Line, Surface and Volume integrals, Gauss divergence theorem & Stokes' theorem	2 hrs
4.4	Equation of continuity, Derivation of Maxwell's equations in vacuum, Comparison of displacement current with conduction current. Electromagnetic waves, Velocity of Electromagnetic waves in free space, Flow of energy and Poynting's vector (no derivation)	4 hrs
5	Superconductivity & Photonics (9hours)	
5.1	Super conducting Phenomena, Meissner effect and perfect diamagnetism, Types of superconductors-Type I and Type II	2 hrs
5.2	BCS Theory (Qualitative), High temperature superconductors, Applications of super conductivity	2 hrs
5.3	Introduction to photonics-Photonic devices-Light Emitting Diode, Photo detectors -Junction and PIN photodiodes, Solar cells-I-V Characteristics	2 hrs
5.4	Optic fibre-Principle of propagation of light, Types of fibres-Step index and Graded index fibres, Numerical aperture –Derivation, Fibre optic communication system (block diagram), Industrial, Medical and Technological applications of optical fibre, Fibre optic sensors-Intensity Modulated and Phase modulated sensors	3 hrs

QUESTION BANK

Module – I

Q.No	Questions	CO	KL
1	What do you mean by oscillation?	CO1	K1
2	Explain angular frequency?	CO1	K2
3	Define damped oscillation and forced oscillation	CO1	K2
4	Derive the differential equation of SHM	CO1	K3
5	Derive forced harmonic oscillation	CO1	K3
6	What do you mean by resonance and sharpness of resonance ?	CO1	K1
7	Compare electrical and mechanical oscillation	CO1	K2
8	A transverse wave on a stretched string is described by	CO1	K4

	$Y(x,y)=4.0\sin(25t+0.016x+\pi/3)$ where x and y are in CM and t is in second obtain a) speed b) amplitude c) frequency d) initial phase of origin		
9	State the transverse vibrations of a stretched string	CO1	K2
10	A piece of wire 50 cm long is stretched by a load of 2.5kg and has a mass of 1.44kg. Find the frequency of the second harmonic?	CO1	K4
11	Calculate the speed of transverse wave in a string of cross sectional area 1mm^2 under tension of 1kg wt density of wire $=10.5 \times 10^3 \text{kg/m}^3$	CO1	K4

Module – II

Q.No	Questions	CO	KL
1	State the conditions for sustained interference	CO2	K2
2	Explain the term coherent source of light	CO2	K1
3	What is diffraction grating?	CO2	K1
4	Derive the relation for n th diameter ring of newton's ring .Why rings are closer for higher order?	CO2	K3
5	State Rayleigh criterion for resolving power	CO2	K1
6	State the difference between diffraction and interference	CO2	K1
7	Explain fraunhofer diffraction through a single slit	CO2	K1
8	What is interference and derive the equation for interference on a thin film ?	CO2	K1
9	Derive the equation for wedge shaped film and explain it	CO2	K2
10	Differentiate between fresnel and fraunhofer diffraction	CO2	K3
11	Explain newton's ring and derive its equation	CO2	K1

Module – III

Q.No	Questions	CO	KL
1	Derive mathematical expression for wave nature of the particle	CO3	K3
2	Write about absence of electrons in a nucleus	CO3	K1
3	Derive mathematical expression Schrodinger time independent wave equation	CO3	K3
4	Derive mathematical expression Schrodinger time dependent wave equation	CO3	K3
5	Define quantum mechanical tunneling	CO3	K3
6	What is the physical meaning of wave equation	CO3	K1
7	Derive mathematical expression for normalized wave equation	CO3	K3
8	Derive mathematical equation for energy eigen values	CO3	K3
9	How does optical and electrical property of the nanomaterial differs from the normal materials	CO3	K3
10	Support the statement that “nanomaterials have vital role in electronic industry “	CO3	K3
11	Does nanomaterials have significant role in medical industries? If yes explain briefly	CO3	K4

Module – IV

Q.No	Questions	CO	KL
1	A proton is moving at 12% of the speed of light in the direction which is 20 degrees up from west. It passes through the earth’s magnetic field which points due north with a strength of 0.5×10^{-4} T. What is the resultant force on the proton? What will the radius of curvature of its path be?	CO4	K3
2	A wire loop is bent into the shape of a square with each side of length 4.5 cm. The loop is placed horizontally on a tabletop with two of the sides oriented north/south and two of the sides oriented east/west. A battery is connected so that a current of 24 mA is produced around the loop; the current flows in the clockwise direction looking from the top. What is the force produced by the earth’s magnetic field on each	CO4	K3

	section of current-carrying wire? What is the overall torque on the loop? What would the torque be if the same length of wire were bent into a circle instead of a square (assuming the same current)?		
3	Derive a mathematical expression for magnetic field “B” on a current carrying hollow cylinder and also state the law which relates to current and magnetic field.	CO4	K5
4	How do you differ paramagnetic and diamagnetic material in physical and chemical aspects?	CO4	K2
5	Derive mathematical expression for Maxwell’s equations in vacuum	CO4	K2
6	Find the curl of the vector field $F = (XYZ, ZY, XZ)$ and state whether is it conservative or not	CO4	K4
7	Verify Stokes theorem for the field $F = (X^2, X/2, Z^2)$ on the ellipse $S = \{(x, y, z) : 4x^2 + y^2 < 4, z = 0\}$	CO4	K4
8	Find the divergence and the curl of $F = \{2xyz, -xy, -z^2\}$	CO4	K3
9	Compare displacement current and conduction current	CO4	K2
10	Define poynting vector	CO4	K3
11	Derive mathematical expression for equation of continuity	CO4	K3

Module – V

Q.No	Questions	CO	KL
1	How do you support the statement that “photonics are used in our daily life”.	CO5	K3
2	Explain about BCS theory	CO5	K2
3	Explain about intensity modulated sensors	CO5	K1
4	How does high temperature superconductors can be stated as sensitive and consistent material in medical field.	CO5	K5
5	How critical magnetic field does differs in type –I and type –II semiconductors.	CO5	K3

6	Explain the properties of superconductor with their application	CO5	K3
7	How does superconductivity material is applicable in electronics	CO5	K4
8	Define LED and its working principle with the help of an diagram	CO5	K2
9	a) Calculate the critical angle when the core refractive index is 2.35 and relative refractive index is 5%. b) Find the numerical aperture of an optical fiber having a core refractive index of 3.25 and a cladding refractive index of 0.80	CO5	K5
10	Derive mathematical expression for numerical aperture	CO5	K3
11	Explain about the method of transforming information with the help of pulses of IR lights.	CO5	K3

Module - I

Chapter - I

Oscillations

Harmonic Motion.

The displacement of the particle executing oscillatory motion that can be expressed in terms of sine or cosine functions are known as Harmonic motion. The simplest type of harmonic motion is called Simple Harmonic motion (SHM).

Periodic Motion

A motion which repeats itself ~~at~~ after regular intervals of time is called periodic motion.

Eg: Oscillations of simple pendulum

motion of Earth around Sun etc...

Oscillatory Motion

A motion in which a particle moves to and fro about a fixed point and repeats the motion after a regular interval of time is called oscillatory motion.

Eg: Oscillations of simple pendulum and loaded spring

Simple Harmonic Motion

A particle is said to execute simple harmonic motion if it moves to and fro periodically along a path such that the restoring force acting on it is proportional to its displacement from a fixed point and is always directed towards that point.

Differential equation for SHM

Consider a particle of mass m executing SHM along a straight line

Then $F \propto \text{displacement}$

$$F \propto -x$$

$$F = -kx$$

where k is the proportionality constant as spring constant. The -ve sign indicates that the restoring force acts against displacement.

$$\begin{aligned} \text{ie } F &= -kx \\ ma &= -kx \\ m \frac{d^2x}{dt^2} &= -kx \end{aligned} \left\{ \begin{aligned} a &= \frac{dv}{dt} = \frac{d}{dt} \left(\frac{dx}{dt} \right) \\ &= \frac{d^2x}{dt^2} \end{aligned} \right.$$

$$m \frac{d^2x}{dt^2} + kx = 0 \Rightarrow \text{differential eqn for SHM}$$

OR

$$\frac{d^2x}{dt^2} + \frac{k}{m}x = 0$$

$$\frac{d^2x}{dt^2} + \omega^2x = 0 \quad \text{--- (1)}$$

Multiplying above eqn by $2\frac{dx}{dt}$

$$2\frac{dx}{dt} \frac{d^2x}{dt^2} + 2\frac{dx}{dt} \omega^2x = 0 \quad \text{--- (2)}$$

Then eqn (2) can be written as

$$\frac{d}{dt} \left(\left(\frac{dx}{dt} \right)^2 + \omega^2x^2 \right) = 0$$

Now integrating $\left(\frac{dx}{dt} \right)^2 + \omega^2x^2 = C \quad \text{--- (3)}$

where C is a constant of integration

To find C

The velocity of the particle at the external position is zero. If ' a ' is the maximum amplitude (maximum displacement), then

$$\frac{dx}{dt} = 0 \quad \text{at } x = a$$

Substitute this in eqn (3)

$$C = \omega^2a^2$$

Then put $C = \omega^2a^2$ in eqn (3)

$$\left(\frac{dn}{dt}\right)^2 + \omega^2 n^2 = \omega^2 a^2$$

$$\left(\frac{dn}{dt}\right)^2 = \omega^2 a^2 - \omega^2 n^2$$

$$\left(\frac{dn}{dt}\right)^2 = \omega^2 (a^2 - n^2)$$

$$\frac{dn}{dt} = \omega \sqrt{a^2 - n^2} \quad \text{--- (4)}$$

$$\frac{dn}{dt} \text{ is Velocity } v = \omega \sqrt{a^2 - n^2} \quad \text{--- (5)}$$

$$\text{From eqn (4)} \quad \frac{dn}{dt} = \omega \sqrt{a^2 - n^2}$$

$$\frac{dn}{\sqrt{a^2 - n^2}} = \omega dt$$

$$\text{Then integrating } \sin^{-1}\left(\frac{n}{a}\right) = \omega t + \phi$$

where ϕ is const of integration

$$\text{i.e., } \frac{n}{a} = \sin(\omega t + \phi) \quad \text{or } n = a \sin(\omega t + \phi) \quad \text{--- (6)}$$

n is the displacement of the particle at any instant t and $(\omega t + \phi)$ is the phase of oscillation at any instant

\Rightarrow Now, the initial phase $\phi = \delta \neq \frac{\pi}{2}$

$$\text{The } n = a \sin(\omega t + \delta + \frac{\pi}{2})$$

$$n = a \cos(\omega t + \delta) \quad \text{--- (7)}$$

also represents SHM
if t is increased by $\frac{2\pi}{\omega}$

$$m = a \sin \left(\omega t + \frac{2\pi}{\omega} \right) + \phi$$

$$= a \sin (\omega t + 2\pi + \phi) = a \sin (\omega t + \phi)$$

\therefore The eqn repeats itself after a time
 $\frac{2\pi}{\omega}$, $4\pi/\omega$ etc

Hence $\frac{2\pi}{\omega}$ is called the period or $T = \frac{2\pi}{\omega}$

$$\omega = \sqrt{\frac{k}{m}} \quad \text{or} \quad T = 2\pi \sqrt{\frac{m}{k}}$$

Damped Harmonic Oscillation

In Free Oscillations total energy of the system remains constant.

The decrease in amplitude of an oscillation caused by dissipative forces is called damping.

In real situations, the total energy is dissipated to its surroundings and the amplitude decays to zero.

Damped Harmonic Oscillator.

When a medium particle in a medium oscillates, a damping force acts in the particle and gradually decrease the amplitude, such as

oscillator is called damped harmonic oscillator and the corresponding motion is called Damped Harmonic Oscillation.

Differential Equation of Damped Harmonic Oscillator

Consider a particle executing damped harmonic oscillation in a medium. The forces acting on it are

- i) Restoring force = $-kx$
- ii) Damping Force = $-b \frac{dx}{dt}$ where b is called damping constant.

Then $F = f_1 + f_2$

$$m \frac{d^2x}{dt^2} = -kx - b \frac{dx}{dt}$$

$$m \frac{d^2x}{dt^2} + b \frac{dx}{dt} + kx = 0$$

$$m \left\{ \frac{d^2x}{dt^2} + \frac{b}{m} \frac{dx}{dt} + \frac{k}{m} x \right\} = 0$$

$$\frac{d^2x}{dt^2} + \frac{b}{m} \frac{dx}{dt} + \frac{k}{m} x = 0$$

Put $\frac{b}{m} = 2\gamma$, where γ is damping coefficient

$\frac{k}{m} = \omega_0^2$, where ω_0 is the natural angular

frequency of the oscillation in the absence of damping force

$$\text{Then } \frac{d^2m}{dt^2} + 2r \frac{dm}{dt} + \omega_0^2 m = 0 \quad \text{--- (2)}$$

This is the differential equation of damped harmonic oscillator.

Solution of the equation

Assume the solution of the form $m = Ae^{nt}$

Then differentiating $\frac{dm}{dt} = Ane^{nt} = \alpha n$

$$\frac{d^2m}{dt^2} = \alpha^2 Ae^{nt} = d^2m$$

Substitute the values in eqn (2)

$$\alpha^2 m + 2r \alpha n + \omega_0^2 m = 0$$

$$d^2 + 2r\alpha + \omega_0^2 = 0$$

The roots of the eqn $d = \frac{-2r \pm \sqrt{4r^2 - 4\omega_0^2}}{2}$

$$\text{Then } m = Ae^{(-r \pm \sqrt{r^2 - \omega_0^2})t}$$

ie, the solutions. $m_1 = A_1 e^{(-r + \sqrt{r^2 - \omega_0^2})t}$

$$m_2 = A_2 e^{(-r - \sqrt{r^2 - \omega_0^2})t}$$

Where A_1 & A_2 are constants which depends on the initial values of position and velocity the value of 'r' determines the behavior of the system.


The general solution is

$$x = A_1 e^{(-r + \sqrt{r^2 - \omega_0^2})t} + A_2 e^{(-r - \sqrt{r^2 - \omega_0^2})t} \quad \text{--- (3)}$$

case I Over damped case ($r > \omega_0$)

If the damping is so high such that $r > \omega_0$ then $\sqrt{r^2 - \omega_0^2}$ is a real quantity and $\sqrt{r^2 - \omega_0^2}$ is less than r . Thus $(-r + \sqrt{r^2 - \omega_0^2})t$ & $(-r - \sqrt{r^2 - \omega_0^2})t$ are both $-ve$. So the displacement (x) decays exponentially to zero without any oscillation. This motion is called over damped or dead Beat or Aperiodic.

Aperiodic - The particle when once displaced returns to equilibrium position slowly without performing any oscillation. Its main application is in Dead beat

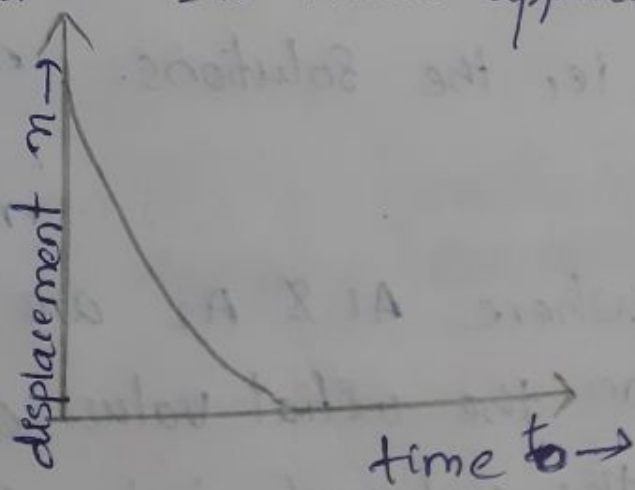

case ② - Critically damped ($r = \omega_0$).

Applying the condition in eqn ③

Then $\sqrt{r^2 - \omega_0^2} = 0$ Or general soln will be

$$m = A_1 e^{-rt} + A_2 e^{-rt} = (A_1 + A_2) e^{-rt}$$

$$\text{let } A_1 + A_2 = C, \text{ Then } m = C e^{-rt}$$

In this eqn there is only one constant and ~~there~~ hence does not form the solution by the second order differential equation.

$$\therefore \sqrt{r^2 - \omega_0^2} = b$$

Then eqn ③ becomes

$$m = A_1 e^{-rt+bt} + A_2 e^{-rt-bt}$$

$$= A_1 e^{-rt} e^{bt} + A_2 e^{-rt} e^{-bt}$$

$$= e^{-rt} (A_1 e^{bt} + A_2 e^{-bt})$$

$$= e^{-rt} \left\{ A_1 \left(1 + bt + \frac{(bt)^2}{2} + \dots \right) + A_2 \left(1 - bt + \frac{(bt)^2}{2} - \dots \right) \right\}$$

• Neglecting higher process if b due to its

Small magnitude

$$m = e^{-rt} \{ A_1 + A_1 bt + A_2 - A_2 bt \}$$

$$= e^{-rt} \{ (A_1 + A_2) + (A_1 - A_2) bt \}$$

Put $A_1 + A_2 = P$ & $(A_1 - A_2)h = \phi$

Then $m = e^{-\gamma t} \{ P + \phi t \}$ — (4)

From the above eqn initially as t increases $P + \phi t$ increase and the displacement also increase out as the time ~~and~~ increases the exponential form increases more than $(P + \phi t)$ term. Then the displacement decreases from maximum value to zero quickly.

The motion neither damped nor oscillatory. \therefore This motion is called ~~over~~ critically damped or just oscillatory. ~~This motion is called~~ Here the particle acquires the position of equilibrium very rapidly.


Applications \leftarrow pointer type instruments like galvanometer

where the pointer moves at once to have a correct position and stay at this position without any oscillation.

\Rightarrow Automobile shock absorbers

\Rightarrow Door close mechanisms

\Rightarrow Recoil mechanism in guns.

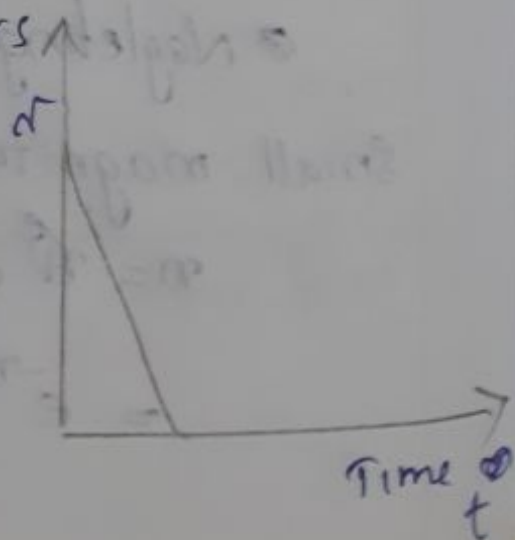

case ③ under damped case ($r < \omega_0$)

Here $\sqrt{r^2 - \omega_0^2}$ is imaginary

$$\sqrt{r^2 - \omega_0^2} = i\omega = i\sqrt{\omega_0^2 - r^2}$$

Then eqn ③ will be

$$n = A_1 e^{(-r + i\omega)t} + A_2 e^{(-r - i\omega)t}$$

$$n = e^{-rt} (A_1 e^{i\omega t} + A_2 e^{-i\omega t})$$

$$= e^{-rt} \{ A_1 (\cos \omega t + i \sin \omega t) + A_2 (\cos \omega t - i \sin \omega t) \}$$

$$n = e^{-rt} \{ A_1 + A_2 (\cos \omega t) + i(A_1 - A_2) \sin \omega t \}$$


Put $A_1 + A_2 = a_0 \sin \phi$ & $i(A_1 - A_2) = A_0 \cos \phi$
ie $n = a_0 e^{-rt} (\sin \phi \cos \omega t + \sin \omega t \cos \phi)$

$$n = a_0 e^{-rt} \sin(\omega t + \phi) \quad \text{--- ⑤}$$

eqn ⑤ shows that motion is oscillatory. The amplitude $a_0 e^{-rt}$ is not a constant but decreases with time

Applications

⇒ Ballistic Galvanometer

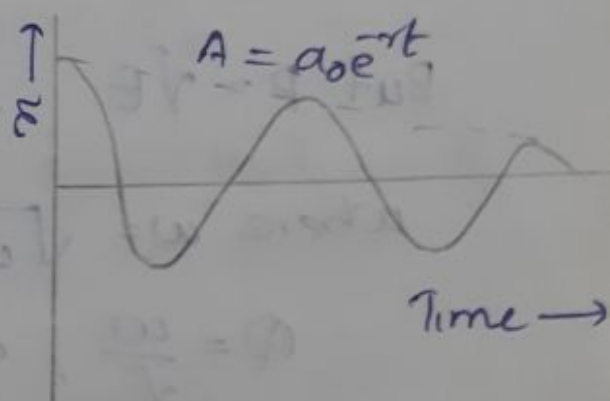

effect of damping

1. the amplitude of oscillation decreases exponentially with time.
2. the frequency of oscillation of a damped oscillator is less than the frequency of undamped oscillations.

Quality Factor

Quality factor is defined as 2π times the ratio of energy stored to the energy loss per period.

$$Q = 2\pi \frac{\text{energy stored}}{\text{energy loss per period}}$$
$$= \frac{2\pi E}{PT}$$

$$\left\{ \begin{aligned} Q &= \frac{2\pi E}{-\frac{dE}{dt} \times t} = 2\pi \frac{E}{PT} \quad P = \text{power dissipation} \\ &= \frac{-dE}{dt} \end{aligned} \right.$$

$$\text{But } P = \sqrt{E} \quad \therefore Q = \frac{2\pi E}{\sqrt{E} T} \Rightarrow \frac{2\pi}{\sqrt{T}} = \frac{2\pi}{\sqrt{\left(\frac{2\pi}{\omega}\right)^2}}$$

$$\text{where } \omega = \sqrt{\omega_0^2 - \gamma^2}$$

$$Q = \frac{\omega}{\gamma}, \quad \gamma = \frac{b}{2m}, \quad b \text{ is damping const}$$

$$\text{Then } Q = \frac{2\omega m}{b} \quad \& \quad Q \text{ is dimensionless}$$

Forced or Driven Harmonic Oscillations

If an external periodic force F is applied on a damped harmonic oscillator, the oscillatory system is called driven or Forced Harmonic oscillator.

or
An oscillator which is forced to oscillate with a frequency other than its natural frequency is known as forced or driven harmonic oscillator.

The forces acting on a forced oscillator are

- 1) Restoring force $-kx$
- 2) The damping force $-bv$
- 3) External driving periodic force

$F_0 \sin \omega_f t$, where F_0 is amplitude

$$\therefore F = F_1 + F_2 + F_3$$

$$ma = -kx - bv + F_0 \sin \omega_f t$$

$$m \frac{d^2x}{dt^2} = -kx - bv + F_0 \sin \omega_f t \quad \text{--- (1)}$$

$$\frac{d^2x}{dt^2} + \frac{kx}{m} + \frac{b}{m} v = \frac{F_0}{m} \sin \omega_f t \quad \text{--- (2)}$$

$$\text{but } v = \frac{dx}{dt}$$

Then eqn ② becomes

$$\frac{d^2m}{dt^2} + \frac{k}{m}m + \frac{b}{m}\frac{dm}{dt} = f_0 \sin \omega_f t \quad \text{--- ③}$$

where $\sqrt{k/m} = \omega_0$, The natural frequency of the body and $\frac{b}{m} = 2d$, the damping constant for unit mass & $\frac{f_0}{m} = f_0$

$$\text{Then } \frac{d^2m}{dt^2} + 2d\frac{dm}{dt} + \omega_0^2 m = f_0 \sin \omega_f t \quad \text{--- ④}$$

above eqn represent differential eqn for forced harmonic oscillator.

③ Solution.

$$m = A \sin(\omega_f t - 0) \quad \text{--- ⑤}$$

$$\frac{dm}{dt} = A \omega_f \cos(\omega_f t - 0)$$

$$\frac{d^2m}{dt^2} = -A \omega_f^2 \sin(\omega_f t - 0)$$

Sub this in eqn ④

$$\begin{aligned} -A \omega_f^2 \sin(\omega_f t - 0) + 2d A \omega_f \cos(\omega_f t - 0) + \omega_0^2 A \sin(\omega_f t - 0) \\ = f_0 \sin(\omega_f t - 0) \end{aligned}$$

(In RHS, we added & subtracted 0)

$$\text{ie, } -A\omega_f^2 \sin(\omega_f t - \theta) + 2r A\omega_f \cos(\omega_f t - \theta) + \omega_0^2 A \sin(\omega_f t - \theta) = f_0 (\sin(\omega_f t - \theta) \cos \theta + \cos(\omega_f t - \theta) \sin \theta)$$

Taking like terms we get

$$(-A\omega_f^2 - f_0 \cos \theta + \omega_0^2 A) \sin(\omega_f t - \theta) + (2r A\omega_f - f_0 \sin \theta) \cos(\omega_f t - \theta) = 0 \quad \text{--- (8)}$$

To find A

Equating the coefficients of $\sin(\omega_f t - \theta)$ & $\cos(\omega_f t - \theta)$, which are zero separating

$$\therefore -A\omega_f^2 - f_0 \cos \theta + \omega_0^2 A = 0$$

$$-A\omega_f^2 + \omega_0^2 A = f_0 \cos \theta \quad \text{--- (9)}$$

$$2r A\omega_f - f_0 \sin \theta = 0$$

$$2r A\omega_f = f_0 \sin \theta \quad \text{--- (10)}$$

Squaring and adding (9) & (10) we get

$$(-A\omega_f^2 + \omega_0^2 A)^2 + 4r^2 A^2 \omega_f^2 = f_0^2$$

$$A^2 \left\{ (\omega_0^2 - \omega_f^2)^2 + 4r^2 \omega_f^2 \right\} = f_0^2$$

$$A = \frac{f_0}{\sqrt{(\omega_0^2 - \omega_f^2)^2 + 4r^2 \omega_f^2}} \quad \text{--- (11)}$$

which is the amplitude of force oscillation.

Phase difference

Dividing eqn ⑦ by ⑧

$$\tan \theta = \frac{2rA\omega_f}{A(\omega_0^2 - \omega_f^2)} = \frac{2r\omega_f}{\omega_0^2 - \omega_f^2} \quad \text{--- ⑩}$$

This gives the phase difference b/w forced oscillation & applied force

Sub for A in eqn ⑤

$$m = \frac{f_0 \sin(\omega_f t - \theta)}{\sqrt{(\omega_0^2 - \omega_f^2)^2 + 4r^2\omega_f^2}} \quad \text{--- ⑫}$$

Above eqn shows that the system vibrate with the frequency of the applied periodic force and having a phase difference of θ

Case I Low driving frequency $\omega_f < \omega_0$

$$A = \frac{f_0}{\sqrt{(\omega_0^2 - \omega_f^2)^2 + 4r^2\omega_f^2}}$$

neglecting ω_f^2 , since ω_f is less than ω_0

$$A = \frac{f_0}{\omega_0^2} = \frac{f_0/m}{k/m} = f_0/k$$

Amplitude ~~do~~ not depend on mass of oscillating body

Case II ($\omega_f = \omega_0$) Resonance

Resonance is a phenomenon that occurs when a vibrating system or external force drives another system to oscillate with greater amplitude at a specific frequency

Here $\omega_f = \omega_0$

$$\therefore A = \frac{f_0}{2r\omega_f} \quad \& \quad \tan\theta = \frac{2r\omega_f}{\omega_0^2 - \omega_f^2} = \infty$$

$$\text{or } \theta = \frac{\pi}{2}$$

Case III


High Driving Frequency $\omega_f > \omega_0$

$$A = \frac{f_0}{\sqrt{(\omega_0^2 - \omega_f^2)^2 + 4r^2\omega_f^2}}$$

when $\omega_f > \omega_0$


$$A \approx \frac{f_0}{\omega_f^2 + \omega_f r \omega_f^2} = \frac{f_0}{\omega_f^2} \quad \text{for low damping}$$

Variation Of Amplitude A with frequency ω_f of applied force

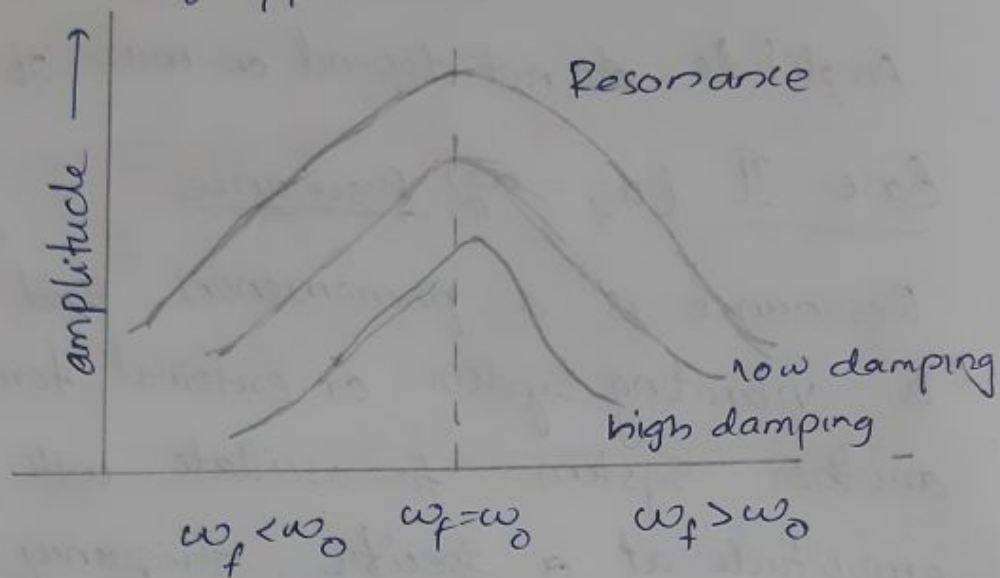

Sharpness Of Resonance

The rate of change (fall) of amplitude with the change of frequency of the applied periodic force on either side of resonant frequency is known as sharpness of resonance. Let P_r is the power absorbed at resonance, P is the power absorbed at any frequency ν a graph is drawn between $\frac{P}{P_r}$ & frequency

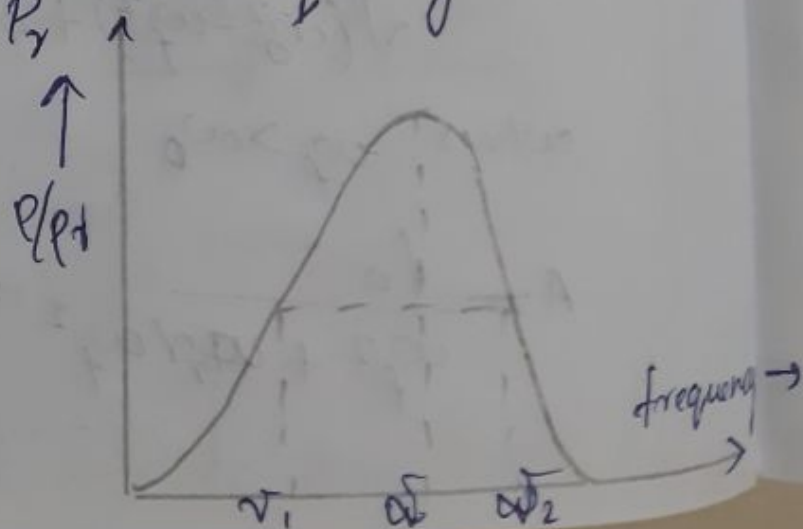

LCR Circuit as Electrical analogue of Mechanical Oscillators.

Oscillations in an LC Circuit.

A pure LC circuit is an electrical analogue of the simple pendulum. In the case of simple pendulum energy alternates between the ~~potential~~ potential and kinetic energy. In case of LC circuit energy is alternately shared in the capacitor as electric field and in inductor as magnetic field.

In LC circuit frequency of oscillation

$$n = \frac{1}{2\pi\sqrt{LC}}$$

Forced Oscillation in A Series LCR Circuit



$$V = V_0 \sin \omega t$$

Applying Kirchoff's Voltage law to the circuit

$$V = V_L + IR + V_C = V_0 \sin \omega t$$

$$L \frac{di}{dt} + IR + \frac{Q}{C} = V_0 \sin \omega t$$

$$L \frac{d^2q}{dt^2} + iR + \frac{q}{c} = V_0 \sin \omega t$$

$$\text{i.e., } \frac{d^2q}{dt^2} + \frac{R}{L} \frac{dq}{dt} + \frac{q}{c} = \frac{V_0}{L} \sin \omega t$$

This is the differential equation in case of Forced Oscillation.

Mechanical Oscillator

Electrical Oscillator

Displacement x

charge q

Velocity $\frac{dx}{dt}$

Current $\frac{dq}{dt}$

mass m

Inductance L

damping coefficient γ

Resistance R

Force amplitude F_0

voltage amplitude V_0

Driving frequency ω_f

oscillator frequency ω_0

The angular frequency of damped oscillations

in LCR circuit is given by

$$\omega = \sqrt{\frac{1}{LC} - \frac{R^2}{4L^2}}$$

Waves

Wave Motion.

wave is a form of disturbance which propagate through space. It transfers energy from one ~~part~~ region of space to another region without transferring matter along with.

Mechanical Waves

Waves which require a medium for their propagation are known as mechanical waves.

Electromagnetic Waves

Waves which do not require a medium for their propagation are known as E.M waves

Progressive Waves

A wave which travel onward with the transfer of energy across any medium is known as progressive wave it is ~~known~~ moving continuously along the same direction.

Stationary Wave.

The progressive waves travelling through the same medium in opposite direction form a stationary or standing wave. Stationary wave do not transfer energy from one place to another. The crest & trough and zone of compression & rarefaction merely appear and disappear in fixed positions.

wavelength

→ The distance b/w two consecutive crests or troughs is called wavelength by transverse wave

⇒ ~~Wavelength~~ ^{or} wavelength is also defined as the distance travelled by the wave during the time a particle of the medium complete n one vibration about its mean position. It is denoted by λ

$$\text{ie, } v = \lambda \nu \quad \text{or} \quad \lambda = \frac{v}{\nu}$$

Transverse Wave Motion

When the particle of the medium vibrate about their mean position in a direction perpendicular to the direction of propagation of a wave, it is called a transverse wave

Eg: Light wave, waves produced in a string under tension

Longitudinal wave motion

When the particles of the medium vibrate about their mean position parallel to the direction of the propagation of waves it is called a longitudinal wave.

Eg: Sound waves etc.

The distance b/w two consecutive compressions or rarefactions is called wavelength of longitudinal wave.

General equation of wave motion.

one dimensional waves

Waves travelling along a line or axis is known as one dimensional wave.

Eg: waves through a string or through a spring

Consider a wave pulse moves in a direction with a velocity v . After a time t the pulse has moved a distance vt .


Let $u(x, t)$ be transverse displacement at x , which is a fn of x & t

$$\text{i.e., } u(x, t) = f(x, t)$$

$$\text{At } x=0, u(x, 0) = f(x, 0)$$

When f describes the shape of wave function. After a time t the pulse travelled a distance

At since the shape of the wave does not change as it travels the wave form must be represented by the same wave function.

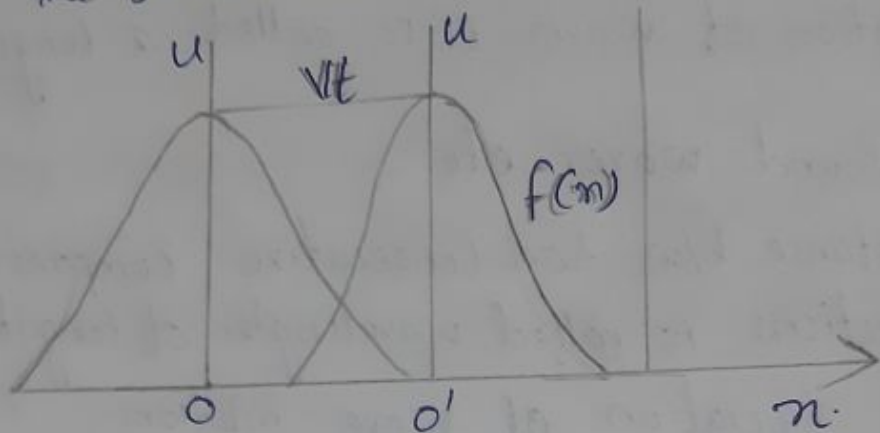

Then $x' = x - vt$

or $u(x, t) = f(x - vt)$

if the pulse moving in opposite direction

$u(x, t) = f(x + vt)$

Sinusoidal waves

Consider a transverse wave having a sinusoidal shape at $t=0$ i.e.

$u(x, 0) = f(x, 0) = a \sin \omega t = a \sin \frac{2\pi}{\lambda} x$

if the wave travels ~~to~~ with a velocity v in the direction of x axis

$u(x, t) = \sin \left(a \sin \frac{2\pi}{\lambda} (x - vt) \right)$

$\frac{2\pi}{\lambda} (x - vt)$ is called phase of wave

at time t

$$u = a \sin \frac{2\pi}{\lambda} (x - vt)$$

$$= a \sin \left(\frac{2\pi}{\lambda} x - \frac{2\pi}{\lambda} vt \right)$$

$$u = \sin(kx - \omega t)$$

Particle Velocity And wave Velocity

particle velocity is the velocity of the particle of the motion undergoing SHM when a harmonic wave travels through it

$$v_p = \frac{du}{dt}$$

wave velocity:-

wave velocity is the velocity of the wave moving in a direction for a wave frequency with a perpendicular ~~force~~ phase.

Differentiating, ~~dm~~ $dm - v dt = 0$

$$\text{or } v = \frac{dm}{dt}$$

General wave Equation

1D wave equation

The equation of wave motion is given by

$$u = f(x - vt) \quad \text{--- (1)}$$

$$u = a \sin \frac{2\pi}{\lambda} (x - vt)$$

$$= a \sin \left(\frac{2\pi}{\lambda} x - \frac{2\pi}{\lambda} vt \right)$$

$$u = \sin(kx - \omega t)$$

Particle Velocity And wave Velocity

particle velocity is the velocity of the particle of the motion undergoing SHM when a harmonic wave travels through it

$$v_p = \frac{du}{dt}$$

wave velocity:-

wave velocity is the velocity of the wave moving in a direction for a wave frequency with a perpendicular ~~force~~ phase.

Differentiating, ~~dm~~ $dm - v dt = 0$

$$\text{or } v = \frac{dm}{dt}$$

General wave Equation

1D wave equation

The equation of wave motion is given by

$$u = f(x - vt) \quad \text{--- (1)}$$

Differentiating eqn ① w.r.t x twice

$$\frac{du}{dx} = f'(x-vt) \quad \text{--- ②}$$

$$\frac{d^2u}{dx^2} = f''(x-vt) \quad \text{--- ③}$$

Differentiating eqn ① w.r.t t twice

$$\frac{du}{dt} = f'(x-vt) \cdot v \quad \text{--- ④}$$

$$\frac{d^2u}{dt^2} = v^2 f''(x-vt) \quad \text{--- ⑤}$$

Sub eqn ③ in ⑤ we get

$$\frac{d^2u}{dt^2} = v^2 \frac{d^2u}{dx^2} \quad \text{or} \quad \frac{d^2u}{dx^2} = \frac{1}{v^2} \frac{d^2u}{dt^2} \quad \text{--- ⑥}$$

This is called 1D differential eqn of wave motion

From eqn ② & ④ $\frac{du}{dt} = v \frac{du}{dx}$

$\frac{du}{dt} \Rightarrow$ Particle velocity

$v \Rightarrow$ wave velocity & $\frac{du}{dx} \Rightarrow$ slope of my wave

ie, Particle velocity = wave velocity \times slope of my wave

Solution

Solution in the form $\frac{d^2u}{dx^2} = \frac{1}{v^2} \frac{d^2u}{dt^2} \quad \text{--- ①}$

$$u(x,t) = x(x)T(t) \quad \text{--- ②}$$

$x(x)$ is a fn of x & $T(t)$ is a fn of t

Differentiating ① twice w.r.t m & w.r.t t
and substitute in eqn ②

$$\frac{du}{dm} = \frac{dx}{dm} T \quad \& \quad \frac{du}{dt} = x \frac{dT}{dt}$$

$$\frac{d^2u}{dm^2} = \frac{d^2x}{dm^2} T \quad \frac{d^2u}{dt^2} = x \frac{d^2T}{dt^2}$$

$$\text{ie } T \frac{d^2x}{dm^2} = \frac{x}{\sqrt{2}} \frac{d^2T}{dt^2} \quad \text{--- ③}$$

dividing eqn ③ by xT

$$\frac{1}{x} \frac{d^2x}{dm^2} = \frac{1}{\sqrt{2}} \frac{1}{T} \frac{d^2T}{dt^2} \quad \text{--- ④}$$

$$\frac{1}{x} \frac{d^2x}{dm^2} = -k^2 \quad \& \quad \frac{d^2x}{dm^2} = -k^2 x \quad \text{--- ⑤}$$

$$\text{Similarly } \frac{d^2T}{dt^2} = k^2 \sqrt{2} T \quad \text{--- ⑥}$$

eqn ⑤ & ⑥ are 2nd order differential equations &
their solutions can be written in terms of exponential

forms

$$\text{ie, } x(m) = C e^{\pm i k m} \quad \text{--- ⑦}$$

$$T(t) = C e^{\pm i \omega t} \quad \text{--- ⑧}$$

Combining these, $u(m, t) = C e^{i(km \pm \omega t)}$
or
 $u(m, t) = C e^{i(km \pm \omega t)}$

C is a constant & can be found by initial condition.

3 Dimensional wave equation

In 3 Dimension the wave eqn can be written as

$$\frac{d^2 u}{dm^2} + \frac{d^2 u}{dy^2} + \frac{d^2 u}{dz^2} = \frac{1}{v^2} \frac{d^2 u}{dt^2} \text{ or}$$

$$\nabla^2 u = \frac{1}{v^2} \frac{d^2 u}{dt^2} \quad \text{--- (7)}$$

where ∇^2 is the Laplacian operator defined

$$\nabla^2 = \frac{d^2}{dm^2} + \frac{d^2}{dy^2} + \frac{d^2}{dz^2}$$

Eqn (7) represents the diff eqn for a wave propagating in any 3D space

Soln

The solution of 3D wave eqn can be

$$u(m, y, z, t) = a e^{i(\vec{k} \cdot \vec{r} \pm \omega t + \phi)}$$

where a & k are constants & they are the amplitude and phase of the wave respectively

$\vec{k} = k_x \hat{i} + k_y \hat{j} + k_z \hat{k}$ is a vector along the direction propagation and is called propagation vector

$$|\vec{k}| = \sqrt{k_x^2 + k_y^2 + k_z^2}$$

$$\vec{r} = x \hat{i} + y \hat{j} + z \hat{k}$$

Transverse Wave in a stretched string

consider a string of length l , stretched b/w two points A & B by a tension. Let it be plucked at the centre and let free. It vibrates transversely. These vibrations are simple harmonic. Let the normal position of the string correspond to x axis & the displacement be along y axis. The force acting to bring any element of the string back to equilibrium position is the component of tension acting right angle to it. Consider a small element of length Δx . The tangents at P & Q make angle θ_1 & θ_2 with the horizontal resolving the tension along x axis & y axis

net force on p₀ acting on
x & y directions are

$$f_x = T \cos \theta_2 - T \cos \theta_1$$

$$f_y = T \sin \theta_2 - T \sin \theta_1$$

For small oscillations θ_1 & θ_2 are small

$$\cos \theta_1 = \cos \theta_2 = 1$$

$$\text{also } \sin \theta_1 = \tan \theta_1 \text{ \& } \sin \theta_2 = \tan \theta_2$$

$$\text{Then } f_x = 0$$

$$f_y = T \tan \theta_2 - T \tan \theta_1$$

So net force acting on element Δm in the displaced position is along y-axis


$$f_y = T (\tan \theta_2 - \tan \theta_1)$$

$$T \delta \tan \theta$$

$$T \delta \int \frac{dy}{dx}$$

If $\frac{m}{\Delta m}$ is mass per unit length of string, mass of element $\Delta m = m \Delta x$

$$\text{acceleration} = \frac{d^2 y}{dx^2}$$

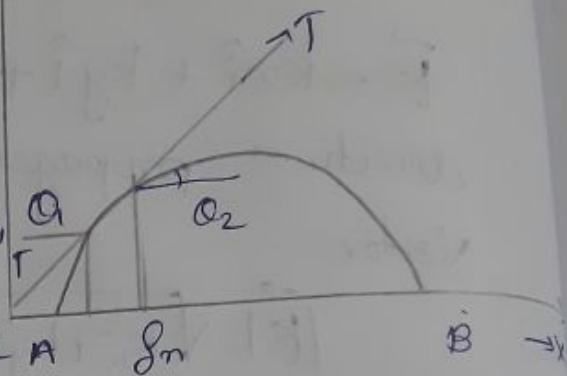

$$m \int \frac{d^2y}{dt^2} = T \int \frac{dy}{dn}$$

$$m \frac{d^2y}{dt^2} = T \frac{dy}{dn}$$

$$\frac{m}{T} \frac{d^2y}{dt^2} = \frac{d^2y}{dn^2}$$

$$\frac{d^2y}{dt^2} = \frac{m}{T} \frac{d^2y}{dn^2}$$

This is the differential eqn of a vibrating string
comparing this eqn by standard wave eqn

$$\frac{d^2y}{dn^2} = \frac{1}{v^2} \frac{d^2y}{dt^2}$$

$$\frac{1}{v^2} = \frac{m}{T}$$

$$v^2 = \frac{T}{m}$$

or $v = \sqrt{T/m}$ Velocity of transverse wave on a stretched string

$$v = \nu \lambda$$

$$\nu = \frac{v}{\lambda} \quad \text{or} \quad \nu = \frac{1}{\lambda} \sqrt{T/m} \Rightarrow \text{Frequency of}$$

transverse wave developed in a stretched string.

Module ②

Interference

The re modification of light energy due to the superposition of the light waves of the same amplitude, same frequency and of constant phase difference is called interference

OR

The phenomenon of interference of light is due to the superposition of two or more light waves by the same amplitude, same frequency and of constant phase difference

Superposition principle

According to superposition principle when two or more waves meet in a region, the resultant displacement in the region is the vector sum of the individual displacements

ie, $y_1 = a_1 \sin \omega t$ & $y_2 = a_2 \sin(\omega t + \delta)$

The resultant displacement $y = y_1 + y_2$

Resultant amplitude

$$A^2 = a_1^2 + a_2^2 + 2a_1a_2 \cos \delta$$

when $\delta = 0, 2\pi, 4\pi \dots 2n\pi$

$$A^2 = (a_1 + a_2)^2 \Rightarrow A = a_1 + a_2 \Rightarrow \text{Maximum}$$

when $\delta = \pi, 3\pi, 5\pi \dots (2n+1)\pi$

$$A^2 = (a_1 - a_2)^2 \Rightarrow A = a_1 - a_2 \Rightarrow \text{Minimum}$$

Condition for constructive interference (For maxima)

\Rightarrow when crest of one wave meets with crest of another
~~trough~~ trough of one meets with trough of other then

the resultant amplitude ~~and~~

to maximum \Rightarrow constructive interference

Condition \Rightarrow

$$\text{Phase difference} = 2n\pi, n = 0, 1, 2, \dots$$

$$\text{path difference} = n\lambda, n = 0, 1, 2, \dots$$

$$\lambda \text{ path difference} = 2\pi$$

Condition for destructive interference (for minima)

when crest of one wave meets with trough of another, then, the resultant intensity and amplitude is minimum \rightarrow Destructive interference

Condition \leftarrow phase difference $(2n+1)\pi$, $n = 0, 1, 2, \dots$

path difference $= (2n+1)\frac{\lambda}{2}$, $n = 0, 1, 2, \dots$

Condition for permanent interference pattern

- \Rightarrow Source must be coherent
- \Rightarrow Light waves from one source should superimpose at the same time and at the same place
- \Rightarrow Two sources should be very close to each other

Coherence

The source of light is said to be coherent, when the light waves emerging from the source must have same amplitude, same frequency and constant phase difference

Eg: Two slits illuminated by a monochromatic screen

- \Rightarrow A source of light and its reflected light image
- \Rightarrow Two refracted images of same source

Two Types of Interference

Interference is divided into two types depending on the mode of production of interference pattern

① Interference produced by the division of wavefront

The incident wavefront is divided into two points by ~~reflection~~ reflection, refraction, diffraction and total internal reflection. Now these two divided points of ~~turns~~ travel unequal distance through the medium and then they combine together to produce interference pattern.

Eg: Young's double slit experiment.

Interference produced by the division of Amplitude

The amplitude or intensity of the incident light is divided into two parts by parallel reflection or refraction. These two divided parts of wavefront travel unequal distances through the medium and then they combine together to produce interference pattern.

Eg: Newton's experiment


conditions for constructive & destructive interference

S_1 & S_2 two coherent sources emitting

waves of wavelength λ . Consider a point P

on a screen the path difference between

the point P is $S_2P - S_1P = S_2Q$

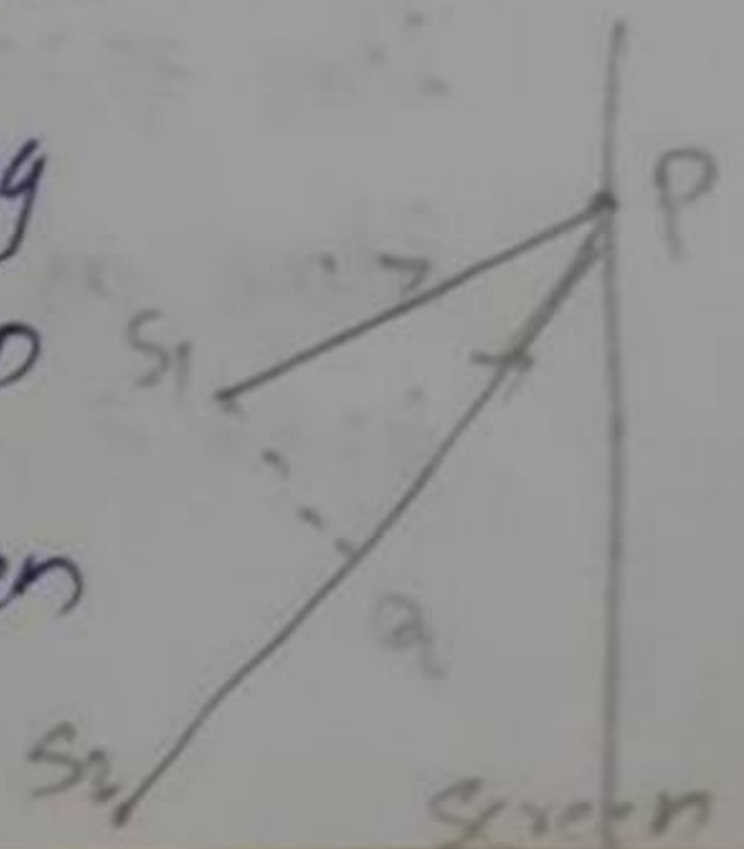

For constructive interference at P , ~~the~~ ~~is~~ to produce a bright point at P , the path difference between the waves meeting P must be ~~an~~ ^{even} or an integral multiple of wavelength λ

$$\text{i.e., } S_2Q = 0, \lambda, 2\lambda, \dots$$

$$\text{or } \boxed{S_2Q = n\lambda}$$

\Rightarrow For destructive interference at P , the path difference between the waves ~~are~~ meeting P must be an odd multiple of $\frac{\lambda}{2}$

$$\text{i.e., } S_2Q = \frac{\lambda}{2}, \frac{3\lambda}{2}, \frac{5\lambda}{2}, \dots$$

$$= (n + \frac{1}{2})\lambda$$
$$\boxed{S_2Q = (2n + 1)\frac{\lambda}{2}} \quad n = 0, 1, 2, 3, \dots$$

Interference of light ~~produced~~ ^{reflected} from plane parallel thin film

When a beam of light falls on a thin transparent film, a part of light is reflected from one top surface of the film and a part of light is reflected from the lower surface of the film. These two reflected rays interfere. If the incident light is white, the film appears beautifully coloured. This is why a film of oil on the surface of water or a soap bubble appears coloured in sunlight.

Diffraction

It is the phenomenon of bending of light round the edges of an obstacle or encroachment of light into the geometrical shadow of the obstacle

Fresnel diffraction

Statement: The diffraction pattern created by the waves which is passing through an aperture or around an object, when viewed from relatively close to the object


OR

The diffraction of light, when the source (light) and screen are at finite distance from the obstacle

- The wavefront falling on the obstacle is spherical or cylindrical
- Lens are not used

Fraunhofer diffraction

The diffraction causes due to a source of light which is at infinite distance from the obstacle

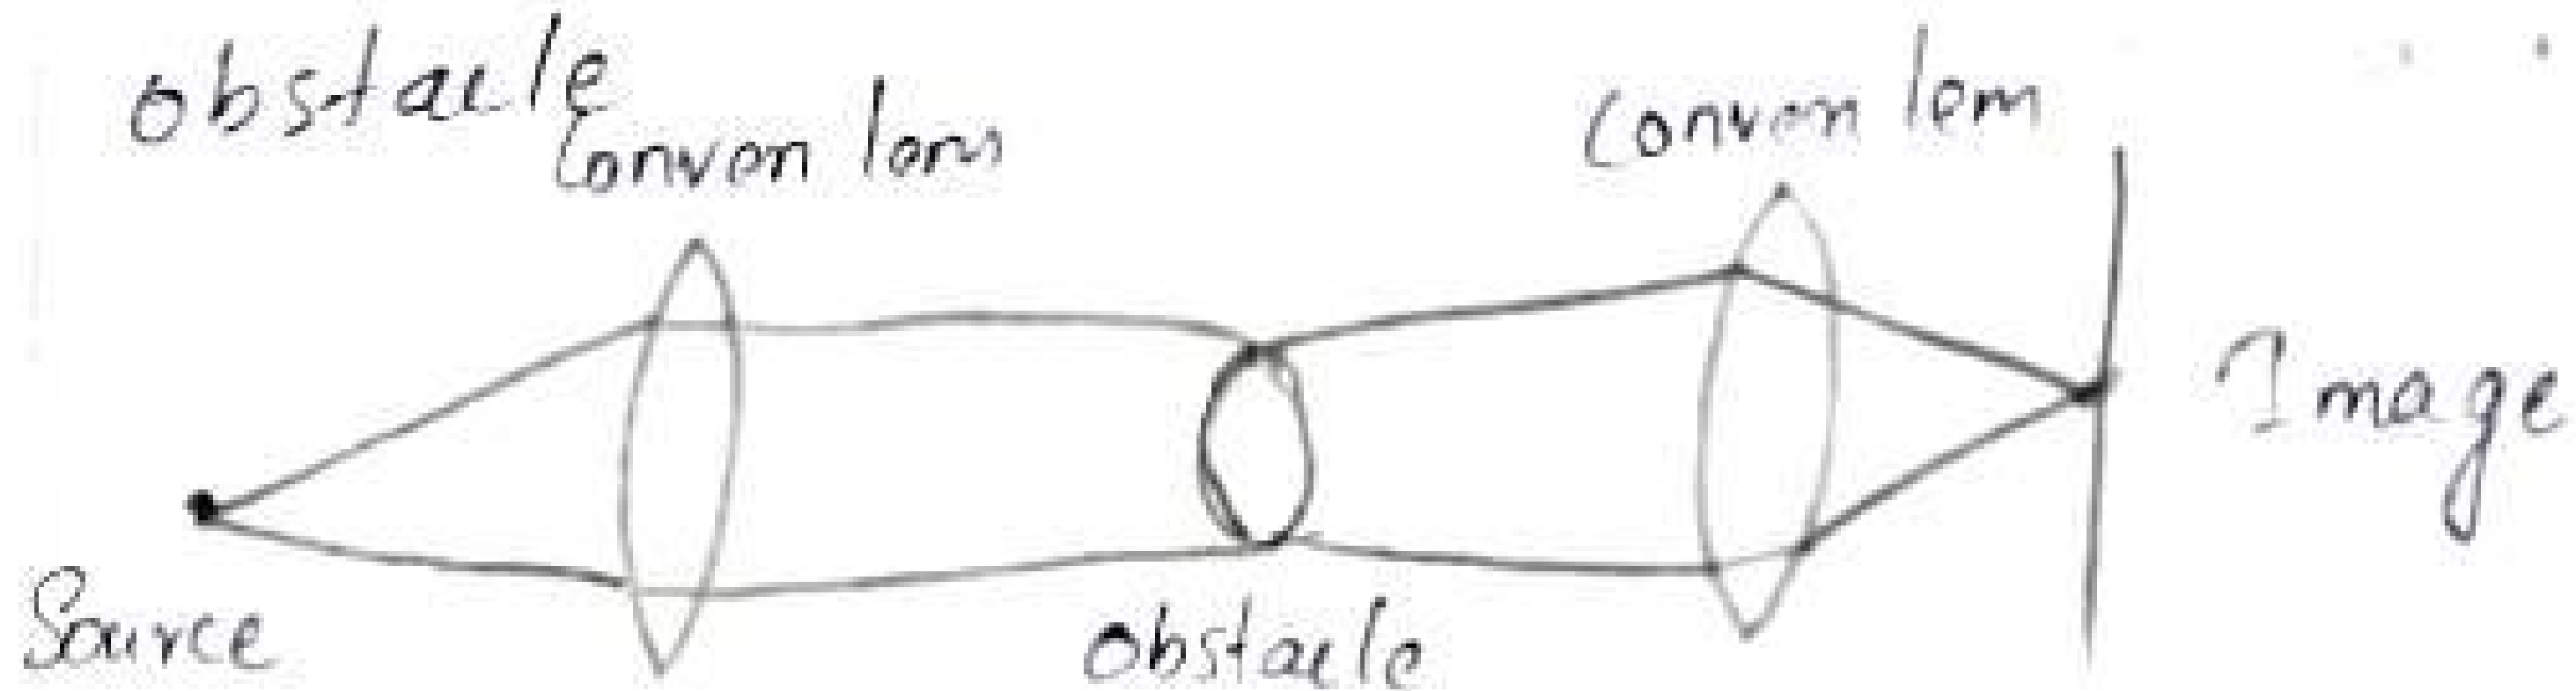


- The wave front falling on the obstacle are plane
- Convex lens are used (converging lens)

Fraunhofer diffraction at a single slit

A plane wave front of monochromatic light of wavelength (λ) passes through the slit AB with width a . Huygens principle states that each point on the wavefront behaves like a secondary wave. So slit AB is an source of point. The centre of the known as 'O'.

The waves proceeding from sources are straight and parallel to the DP ^{focused on} ~~covering~~ the point 'P'. They rays are covering equal path and same phase without any path difference and resolves the point P and these leads to maximum brightness due to constructive reinforcement of waves. Thus bright band is occurred at the point P, known as zero order central maximum.

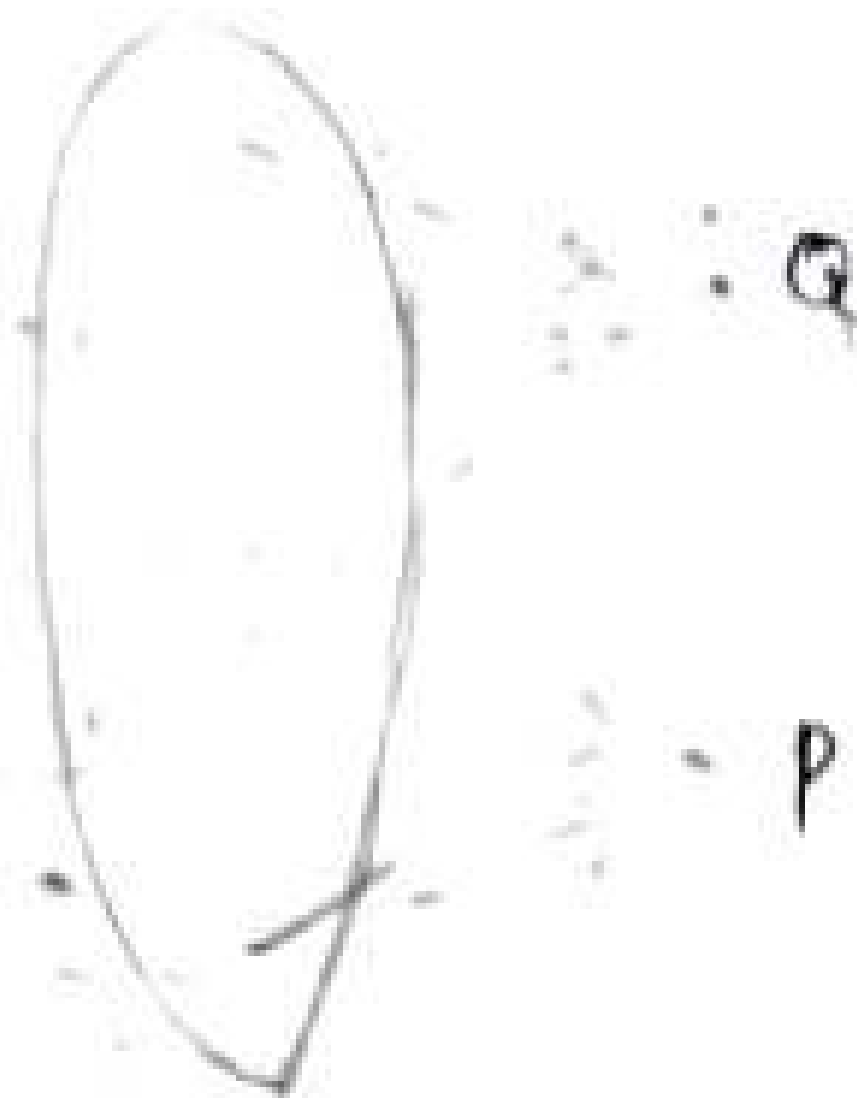

A point on the screen which is just above the point with an angle θ , a line AM is drawn ~~per~~ \perp to BM and beyond this point the waves have same path

BM is the path difference between two

3/10

So $BM = a \sin \theta$ — (1)

(consider triangle ABM $\sin \theta = \frac{BM}{AB}$)

$BM = \lambda$ (wave length of light)

(1) $\rightarrow \lambda = a \sin \theta$ — (2)

The total distance between the slits is a . so by considering the midpoint O' AO and BO is $a/2$ where O' is half of O (total distance)

$\therefore AO = BO = a/2$ — (3)

The waves proceeding from O and B are traveling along OM and BM reaches the point the

point (due to lens)

From the equation. no ②

$$n\lambda = (a+b) \sin \theta$$

? If $n=1 \rightarrow$ First order principle maxima

$n=2 \rightarrow$ Second order principle maxima

$n=3 \rightarrow$ Third order principle maxima

There are N lines / unit length of grating ~~there are~~

There N sub are.

$$N(a+b) = 1 \rightarrow \text{unit length}$$

$$a+b = \frac{1}{N} \quad \text{--- ③}$$


Sub eqn ③ ① ② \rightarrow

$$\frac{1}{N} \sin \theta = n\lambda$$

$$\text{or } \boxed{\sin \theta = nN\lambda} \rightarrow \text{Grating law or Equation}$$


Rayleigh's Criterion For Resolution of Spectral lines

It states that when one principle maximum falls on the other first minimum, ~~the~~ some order then both the waves will be visible separately

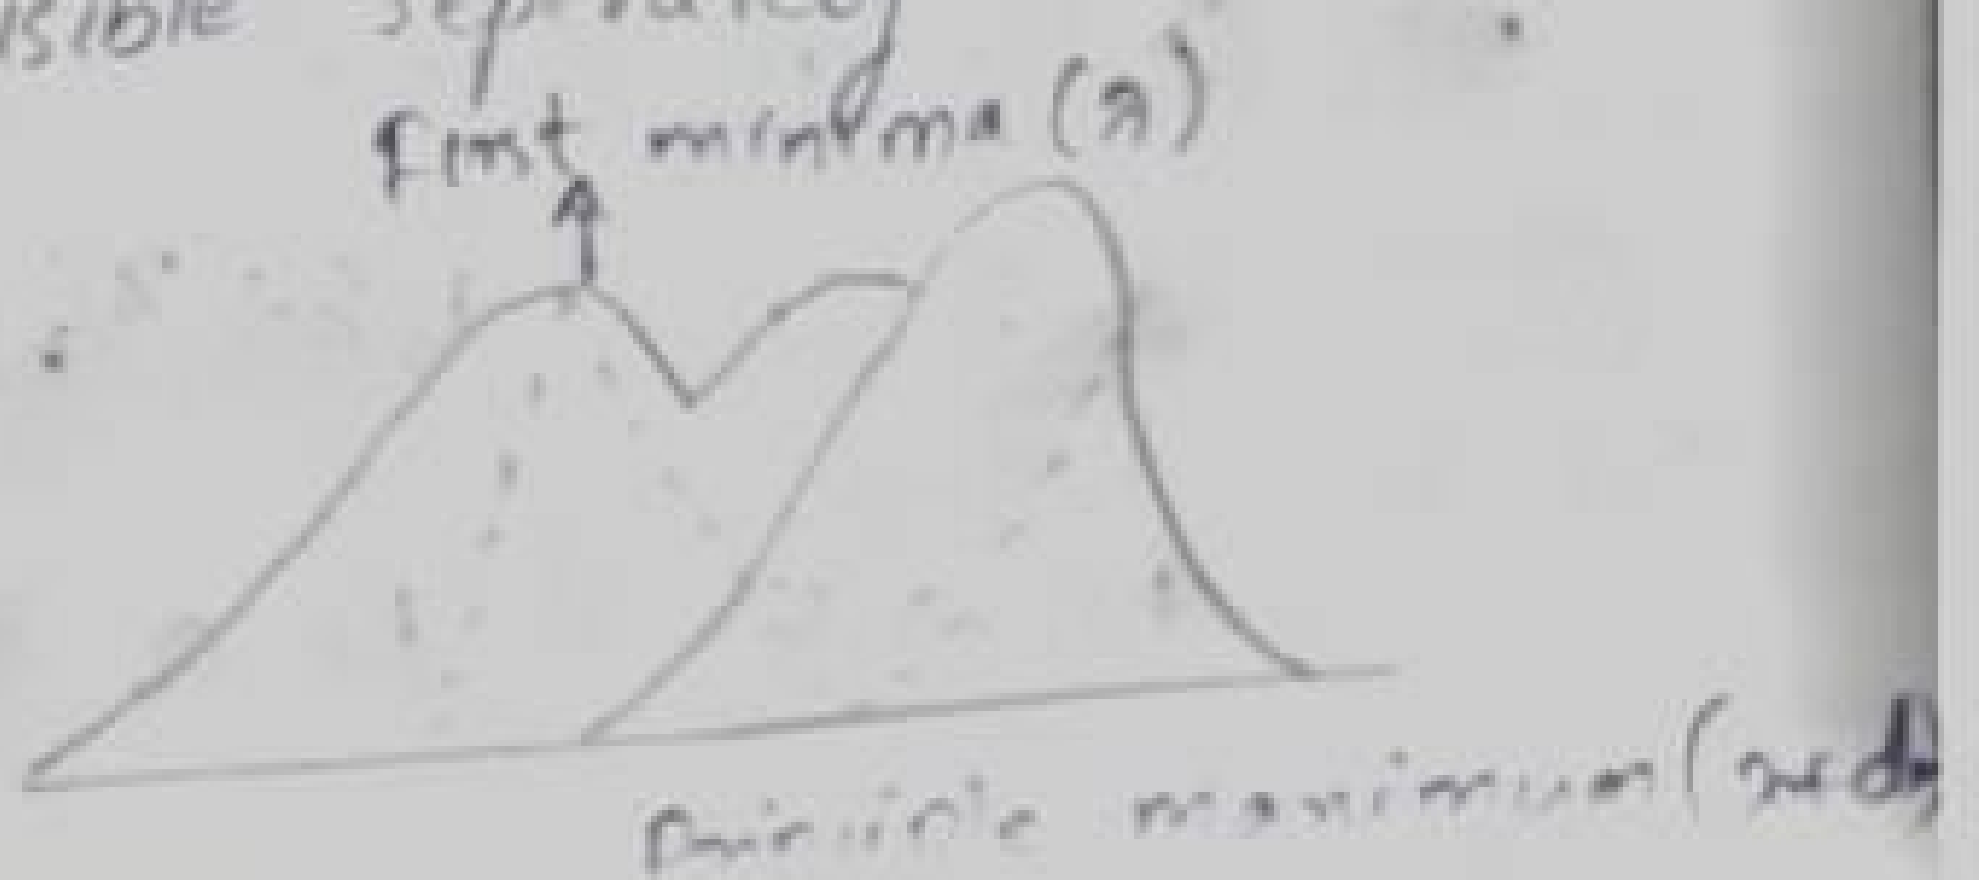

Diffraction Grating by sub.

Two waves from the corresponding points A & C of adjacent sub. Let λ be the wavelength and θ be the angle of diffraction with the normal to the grating. They travel along Am and CN & AK perpendicular to the line Am path. Path difference is AK.

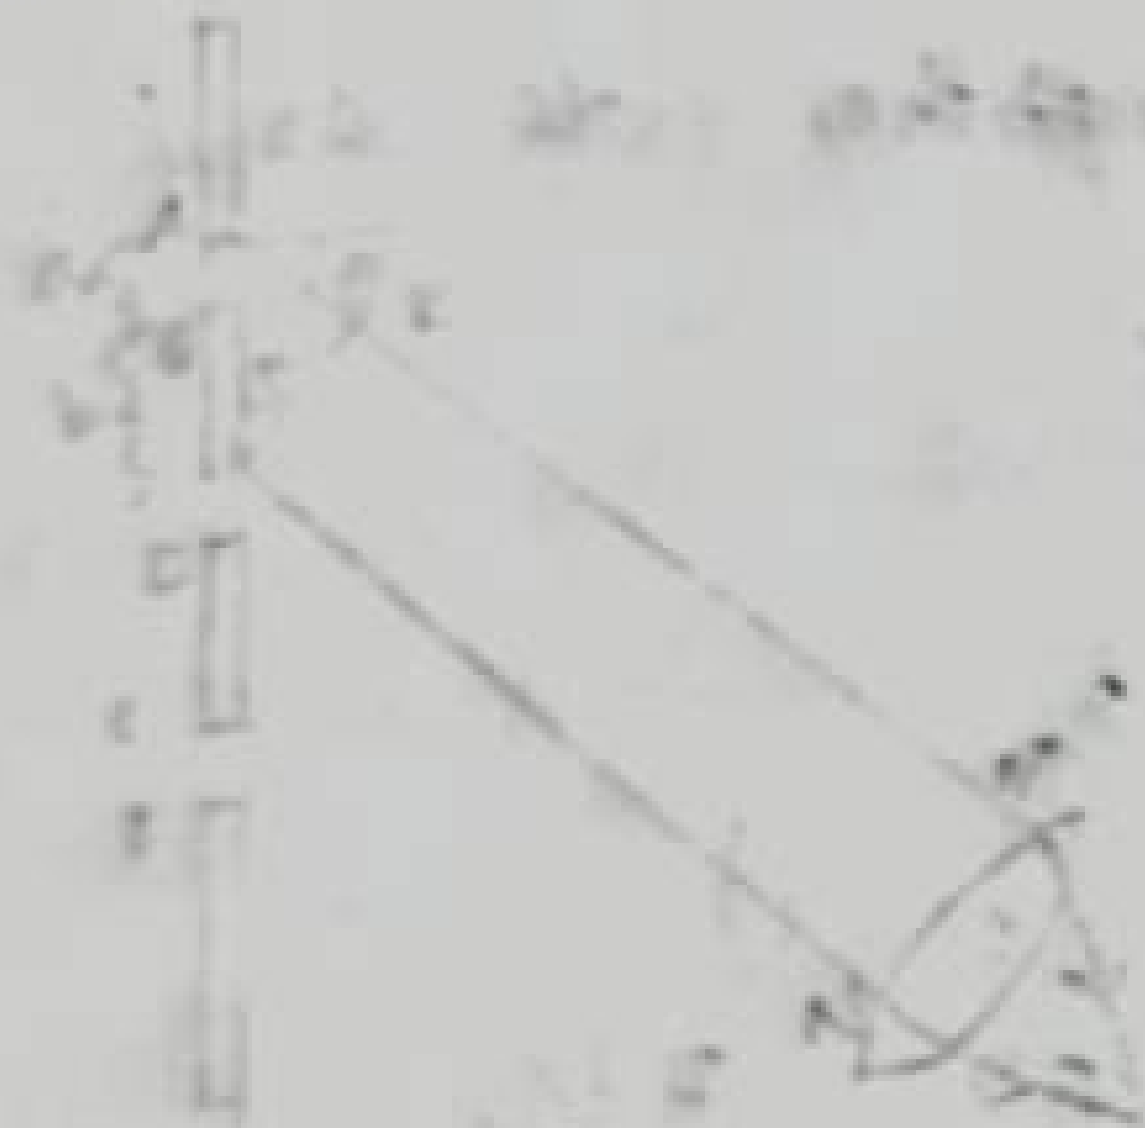

$\triangle ACK$

$$\sin \theta = \frac{AK}{AC}$$

$$\therefore AK = AC \sin \theta$$

$$AK = a \sin \theta \quad [AC = a]$$

Where AK is the path difference (represented by $n\lambda$)

$$\therefore n\lambda = a \sin \theta \quad \text{(when two waves interfere constructively)}$$

The waves of wavelength λ originate

from different corresponding points with diffracted angle θ reinforce and give a bright line at

Resolving Power of Grating

Resolving power of grating is defined as the measure of its ability to spatially separate two wavelengths.

• In Grating there are N slits and path difference when they reach a point on the screen. The path difference between the waves from adjacent slits is changed by λ/N . If grating has two halves then the path difference is $\lambda/2$.

According to Rayleigh's criterion for Resolution two separate lines are just resolved when the principle maximum of n th order for $\lambda + d\lambda$ falls at the first minimum of the same order for λ . Then the angle difference is same.

n th Order principle maximum for $\lambda + d\lambda$ is

$$(a+b) \sin \theta = n(\lambda + d\lambda) \quad \text{--- (1)}$$

$(a+b)$ = grating constant
 n th Order maxima

$$a+b \sin \theta = n\lambda + \lambda/N \quad \text{--- (2)}$$

N → Total no of slits

Substitute ② in ①

$$n(\lambda + d\theta) = n\lambda + \lambda/N,$$

$$n\lambda + n d\theta = n\lambda + \lambda/N, \quad \text{--- ③}$$

By simplifying above equation

$$n\lambda + n d\theta = n\lambda + \lambda/N,$$

$$N d\theta = \lambda$$

$$\boxed{N d\theta = \lambda} \rightarrow$$


Resolving power of grating

When we use lens the above eqn can be written as

$$\theta_N = 1.22 \lambda/D$$

The condition for Rayleigh's criterion for minimum angle of resolution using a lens with diameter 'D' at a wave length λ is given by

$$\theta_{\text{min}} = \frac{1.22 \lambda}{D}$$

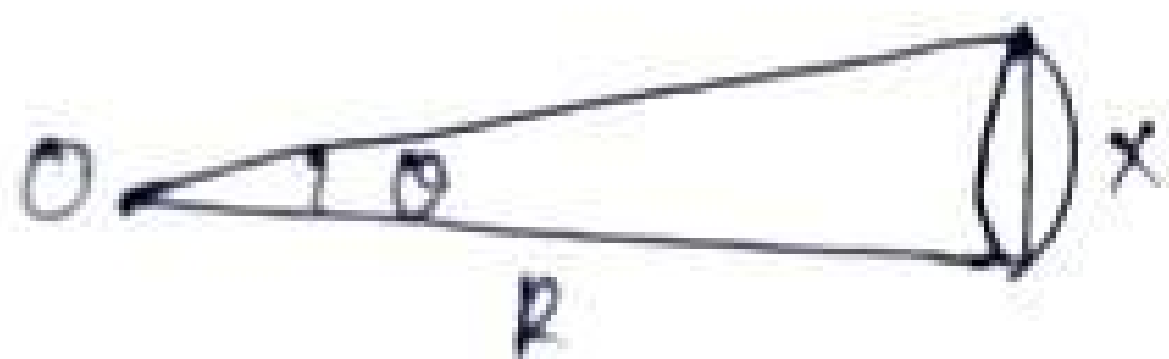

Dispersive power of a grating

It is known as the ratio of change in angle of diffraction to the corresponding change in wavelength.

let λ and $\lambda + d\lambda$ with angles θ and $\theta + d\theta$
The dispersive power of grating is $\frac{d\theta}{d\lambda}$
 $\therefore n^{\text{th}}$ maxima for a wave length λ

$$(a+b) \sin \theta = n\lambda \quad \text{--- (1)}$$

differentiating both sides

$$(a+b) \cos \theta d\theta = n d\lambda$$

$$\frac{d\theta}{d\lambda} = \frac{n}{(a+b) \cos \theta}$$

$$\frac{d}{d\lambda} = \frac{n}{a+b}$$

so $\boxed{\frac{d\theta}{d\lambda} = \frac{n}{(a+b) \cos \theta}}$

dispersive power
Formula

NANOSCIENCE

Nanoscience is the study of and application of structure and materials that have dimensions at the nanoscience level. Nanoscience is the study of nanomaterials and their properties, and the understanding of how these materials, at the molecular level, provide novel properties and physical, chemical and biological phenomena that have been successfully used in innovative way in a range of industries.

Feynman's 1959 talk is often cited as a source of inspiration for Nanoscience but it was only published as a scientific paper in 1992.

Nanotechnology

Nanoscience is the science and technology of object at the nanoscale level, the properties of which differ significantly from that of their constituent material at the macroscopic or even microscopic scale. It is a multidisciplinary field that encompasses understanding and control of matter at about 1-100nm, leading to development of innovative and revolutionary applications.

Difference b/w Nanotechnology & Nanoscience

Nanoscience and Nanotechnology are the study & application of extremely small things, The materials with nanometre dimensions. Nanoscience is where atomic physics converges with the physics & chemistry of complex systems. Nanoscience technology is the science and technology of objects at the nanoscale level, the properties of which differ significantly from that of their constituent material at the macroscopic or even microscopic scale. When we're talking about a scale an order of magnitude of size, or length. Nanoscience is the study of structures and materials on the nanoscale.

Nanotechnology is a multidisciplinary field that encompasses understanding and control of matter at about 1-100nm, leading to development of innovative and revolutionary applications. It encompasses nanoscale sciences, engineering and technology in addition to modeling and manipulation of matter on an atomic, molecular & supermolecular scale. Nanoscience is about the phenomena that occurs in systems with nanometre dimensions.

& it involves understanding the fundamental interactions of physical systems confined to nanoscale dimensions and their properties.

INCREASE IN SURFACE AREA TO VOLUME RATIO

When size of the particle ↓ the ratio of surface area to volume ↓

"The ratio of surface area to volume (SAVR) plays a vital role in nanoscience and nanotechnology. The ratio is the amount of surface area per unit volume of an object."

Cube :-

consider a cube with a side length of 10, volume of the cube is $10^3 = 10 \times 10 \times 10$ (or a^3) \Rightarrow

where 'a' is the side of a cube:

area is $10 \times 10 = 100$ (a^2), cube has 6 sides.

$$\begin{aligned} \text{Total surface area} &= 6(10 \times 10) \\ &= 6 \times 10^2 \\ &= 600. \end{aligned}$$

Surface volume ratio :-

$$\frac{\text{Surface area}}{\text{Volume}} = \frac{600}{10^3} = 0.6$$

\Rightarrow when the same cube with side 'a' is 5

$$\text{Volume is } a^3 = 5 \times 5 \times 5 = 125$$

$$\text{area} = 5 \times 5 = 25$$

$$\text{cube has 6 faces} = 6 \times a^2 = 6 \times 25 = 150$$

So SAVR (Surface area to the volume ratio) is,

$$\frac{\text{Surface area}}{\text{Volume}} = \frac{150}{125} = 1.2$$

So it is proved that when size ↓ the surface area to the volume ratio ↑. So it is proved that nanomaterials has more (enhanced) 'SAVR' than the micro or macro molecules.

\Rightarrow Solve

If side of a cube has length of 1

$$\text{Volume} = 1^3 = 1$$

$$\text{area} = 1^2$$

$$\frac{\text{area}}{\text{Vol}} = \frac{1}{1} = 1$$

\Rightarrow Solve

Derive an eqn when side of cube is 's' if 's' is the side

$$\text{Volume of the cube} = s^3$$

$$\text{Surface area of cube} = 6s^2$$

$$\text{Ratio of surface area to volume} = \frac{6s^2}{s^3} = \frac{6}{s}$$

Quantum Confinement

The change in electronic and optical properties of the material when its size is reduced (10nm or less than 10nm) is considered as Quantum Confinement.

Quantum Confinement in One Dimension

Quantum Confinement

The optical property & electrical property changes when the material sample is of sufficiently small size (10nm or less than 10nm)

When the length of a semiconductor is reduced to the same order of the exciton radius to a few nanometers, quantum mechanical confinement effect occurs & the exciton properties are modified. These types of quantum confinement structures are quantum well (QW), Quantum wire (QR) & Quantum dot (QD)

Exciton


It is a bound state of an e^- & hole can empty electron state in a valence band, which is free to move through a nanometallic crystal.

Exciton radius

It is the distance b/w e^- -hole pair.

Quantum Well

It is a well thin layer which can confine particles (quasi) (e^- or holes) in the dimension \perp to the layer surface, whereas the movement of particles in other dimension is not restricted. The thickness of one quantum well is \approx 5-20 nm.

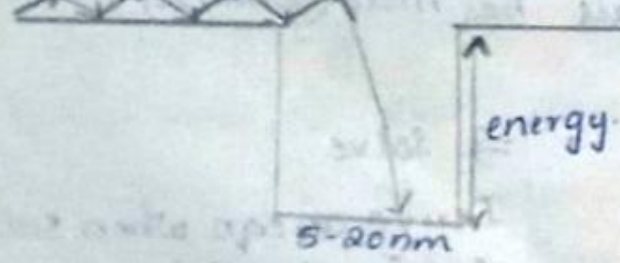

One dimensional Quantum Confinement

The optical & electrical property of the material sample changes & forms in a one dimensional (1D) such materials are known as 1D quantum confinement.

Electrons confined in one dimensional (1D) quantum well (thin film) e^- can easily move in 2-D, so one dimensional is quantified.

e^- confined in 2-D quantum wires, e^- can easily move in 1-D, so 2-D is confined.

e^- confined in 3-D, quantum dots (QD) so 3-D is quantized.

Nanosheet

A 2-D nanostructure with thickness (1 to 100nm)

eg: Graphene

Example: - ① Silicon nanosheets: are being used to prototype future generation transistors (5nm)

② Carbon nanosheets: - A graphene alternate, used as electrodes in super capacitors.

Nanowire

A nanostructure with the diameter of the order of nanometers (10^9 nm) ratio of length to width is greater than 1000 it's mainly used for transistors (MOSFET)


Quantum Wire

A formation of confined 2-Dimension system by making a thin wire of the selected semiconductor.

Trapped excitons in 2-D quantum confinement but it is free to move in 1-D only along the wire.

Quantum Dots:-

A semiconductor nanocrystalline materials with diameter usually at 2-10nm, it can produce distinctive colours determined by the size and shape.

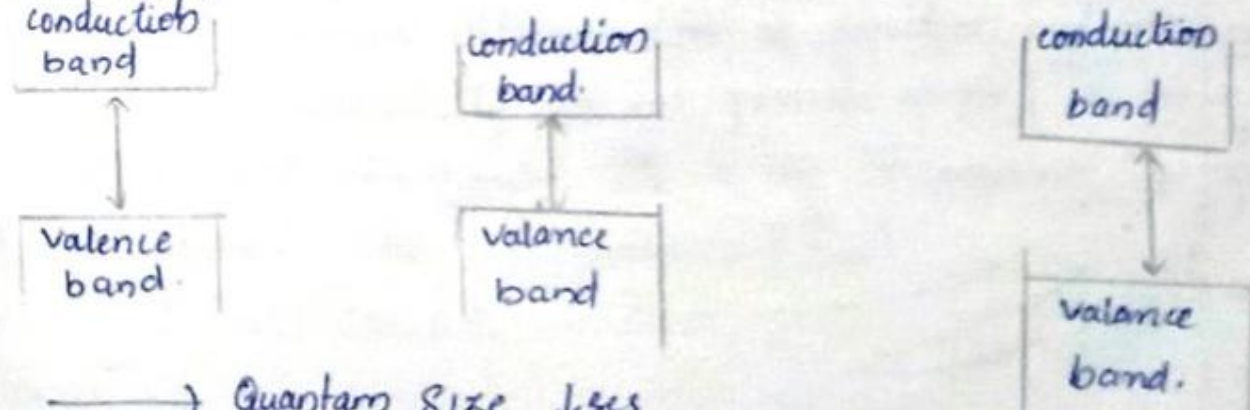

Due to quantum confinement the electrons come back to the valence band & uses ΔE energy (light)

According to quantum mechanics energy of photons relates to the wavelength (colour) of photons. This means emitted colour

depends on band gap. Various size of quantum dots results in different colouring. Small size emits blue colour light but larger band gap where as bigger size will emit red colour light with small band gap (TV screens - LED TVs)


Optical Properties

Nanocrystalline systems have interesting optical properties. Depending on the particles size, same substance shows different colours. Gold nanoparticles of 100nm appears orange to colour while that of 50nm size appears green. In the case of nanosized semiconductor particles quantum effects come into play and optical properties can be varied merely by controlling its size. These particles can be made to emit or absorb specific wavelength of light by varying its size. The linear and non-linear properties of such materials can be tuned in the same way. Nanomaterials such as tungstic oxide gel is explored for large electronic display devices.

Magnetic properties

The strength of a magnet is measured in terms of coercivity and saturation magnetization values. These values increase with a decrease in grain size and with increase in specific surface area (surface area per unit volume). Therefore nanomaterials present good properties in this field.

In small particles a large fraction of the atoms reside at the surface. These atoms have lower co-ordination numbers than the interior atoms. The magnetic moment is determined by the local co-ordination number. Fig. 4 shows the calculated dependence of magnetic moment on the nearest coordination number.

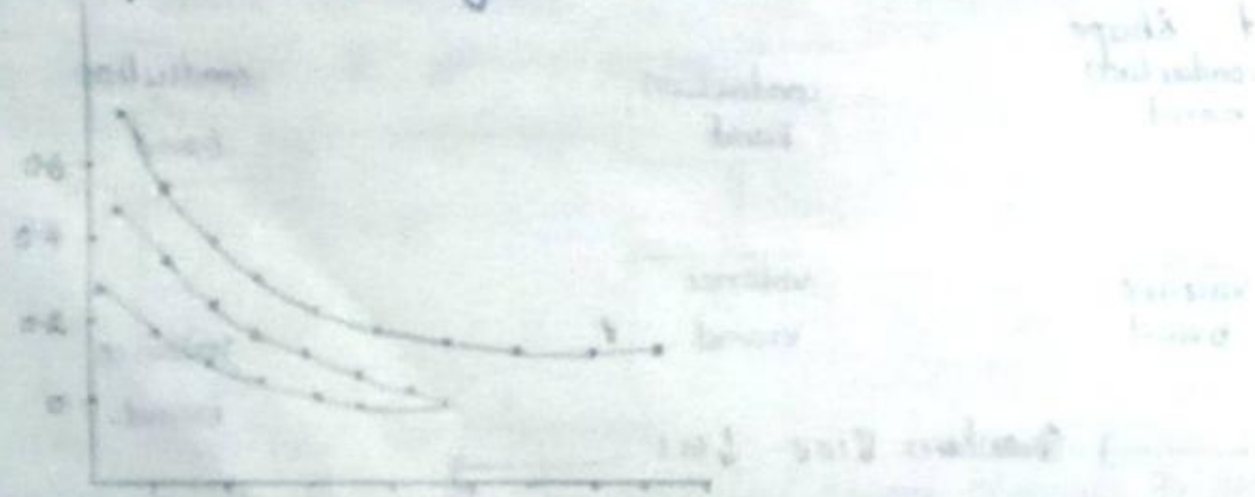

It is clear that as the co-ordination number decreases the magnetic moment increases. In short, small particles are more magnetic than bulk materials. Even nanoparticles of nonmagnetic solids are found to be magnetic i.e., at small sizes, the clusters become spontaneously magnetic.

Mechanical properties

Most metals are made up of small crystalline grains. The boundaries btw the grains slow down or arrest the propagation of defects when the mechanical material is stressed, thus giving its strength. If the grains are nanoscale in size the interface area is greatly increasing, which increases its strength. For eg: nanocrystalline (substance) nickel is as strong as hardened steel. Because of the nanosize, many of their mechanical properties such as hardness, elastic modulus, fracture toughness, strain resistance and fatigue strength are modified.

Some observations on the mechanical behaviour of nanostructured materials are:

- 1) 30-50% lower elastic modulus than conventional materials.
- 2) 2-7 times higher hardness.
- 3) Super plastic behaviour in brittle ceramics.

The experimental behaviour of hardness measurements show different behaviour namely positive slope, zero slope, and negative slope depending on the grain size, when it is less than 20nm. Thus the hardness, strength and deformation behaviour of nanocrystalline materials is unique and not well understood.

Super plasticity is another phenomenon that has been found to occur in nanocrystalline materials at some what lower temperature and higher strain rates.

Heisenberg's Uncertainty Principle


It states that it is impossible to determine position (x) and the momentum (p) of a particle with absolute precision.

Statement

In any simultaneous determination of position and momentum of the particle, the product of uncertainty Δx (or possible error) in the x-co-ordinate of a particle in motion and uncertainty Δp_x in the x-component of momentum is of the order of or greater than $h = (1.054 \times 10^{-34} \text{ Js})$

$$\Delta x \Delta p_x \geq h$$

Proof →
Consider a particle (wavepacket) moving in x-axis. The envelope of the wave packet moves with a velocity equal to particle velocity. When the wave packet extends over a finite distance, the two points at which the amplitude of the wave packet becomes zero and it will be repeated successively.

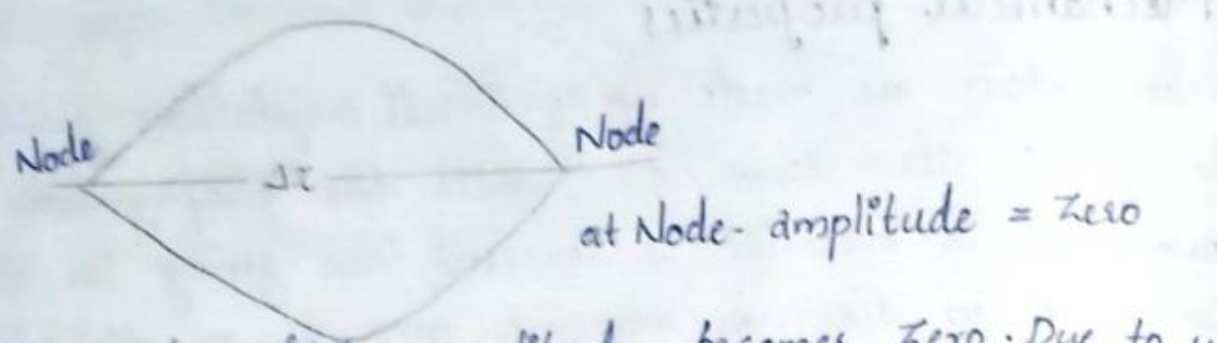

Nodes means the points at which amplitude becomes zero. Due to wave nature of the particle position of the particle will have minimum error equal to distance (Δx)

The amplitude of the wave packet is,

$$R = 2A \cos \left[\frac{\Delta \omega}{2} t - \frac{\Delta k}{2} x \right] \quad (1)$$

At node amplitude is zero.

$$\text{So, } 0 = 2A \cos \left[\frac{\Delta \omega}{2} t - \frac{\Delta k}{2} x \right] \quad (2)$$

Since $2A \neq 0$ (taking $2A$ to LHS)

$$\cos \left[\frac{\Delta \omega}{2} t - \frac{\Delta k}{2} x \right] = 0 \quad (3)$$

$$\left[\frac{\Delta \omega}{2} t - \frac{\Delta k}{2} x \right] = 0$$

When \cos is $(2n+1) \frac{\pi}{2}$ i.e., $\frac{\pi}{2}, \frac{3\pi}{2}, \frac{5\pi}{2} \dots$ (4)

we know there are two nodes so the position are also two.

\therefore positions of two nodes are two i.e.,

$$\text{1st position } \frac{\Delta \omega}{2} t - \frac{\Delta k}{2} x_1 = (2n+1) \frac{\pi}{2} \quad (5)$$

$$\text{2nd position } \frac{\Delta \omega}{2} t - \frac{\Delta k}{2} x_2 = (2n+1) \frac{\pi}{2} + \pi = (2n+3) \frac{\pi}{2} \quad (6)$$

on simplifying (5) and (6) (subtraction)

$$\frac{\Delta k}{2} (x_2 - x_1) = \pi \quad (7)$$

$$\Delta k (x_2 - x_1) = 2\pi$$

$$x_2 - x_1 = \frac{2\pi}{\Delta k} \quad (8)$$

$$\Delta x = \frac{2\pi}{\Delta k} \quad (9)$$

This is the fundamental error in the measurement of the position of the particles.

$$k = \frac{2\pi}{\lambda} \quad (10)$$

$$\lambda = h/p_x \quad (11)$$

where $h \rightarrow$ Planck's constant

$\Delta p_x \rightarrow$ momentum of the particle in x-axis.

$$\text{Since, } k = \frac{2\pi}{\lambda}$$

Sub eqn (11) in eqn (10)

$$k = \frac{2\pi}{h/p_x} ; k = \frac{2\pi p_x}{h}$$

$$\text{i.e., } \Delta k = \frac{2\pi (\Delta p_x)}{h} \quad (12)$$

from eqn no 9 $\Delta x = \frac{2\pi}{\Delta k}$

Sub eqn (12) in eqn (9)

$$\Delta x = \frac{2\pi}{\frac{2\pi \Delta p_x}{h}} = \frac{h}{\Delta p_x}$$

$$\Delta x = \frac{h}{\Delta p_x}$$

According to superposition of waves.

$$\Delta x = \frac{1}{\Delta k} \quad \text{or} \quad \Delta k = \frac{1}{\Delta x}$$

$$\frac{1}{\Delta x} = \frac{2\pi \Delta p_x}{h} \quad (\text{from eqn 12})$$

$$\frac{1}{\Delta x \Delta p_x} = \frac{2\pi}{h}$$

$$\Delta x \Delta p_x = \frac{h}{2\pi}$$

$$\Delta x \Delta p_x = \hbar$$

$$\frac{h}{2\pi} = \hbar$$

Thus, $\Delta x \Delta p_x \geq \hbar$

Que A microscope using photons is employed to locate an e^- in an atom 0.2 \AA . what is the uncertainty in the momentum of the e^- located in this solution. Given $\Delta x = 0.2 \text{ \AA} = 2 \times 10^{-11} \text{ m}$ $\Delta P = ?$

ans. Since we know that the Uncertainty principle

$$\Delta x \Delta P_x = \frac{h}{2\pi}$$

$$\Delta P_x = \frac{h}{2\pi \Delta x}$$

$$\Delta P_x = \frac{6.626 \times 10^{-34}}{2\pi \times 2 \times 10^{-11} \text{ m}}$$

$$= 5.27 \times 10^{-24} \text{ kg m/s}$$

Que Show that the uncertainty in the location of the particle is equal to the de Broglie wavelength the uncertainty in its velocity is equal to its velocity.

ans. Solution, Given $\Delta x = \lambda$

Since we know that by uncertainty principle

$$\Delta x \Delta P_x = \frac{h}{2\pi \Delta x}$$

$$\Delta P_x = \frac{h}{2\pi \Delta x}$$

$$\Delta x \Delta P_x = \hbar$$

$$\lambda \Delta P = \hbar$$

$$\Delta P = \frac{\hbar}{\lambda}$$

$$\text{we have } \frac{\hbar}{\lambda} = p \quad \text{ie } \Delta P = P$$

$$\Delta P = P$$

$$m \Delta V_x = m V_x$$

$$\frac{m}{m} \Delta V_x = V_x$$

$$\Delta V_x = V_x$$

Que A microscope along using photons is employed to located an e^- in an atom 5 \AA . what is Uncertainty in the momentum of the e^- located in this.

ans. $\Delta x = 5 \text{ \AA} = 5 \times 10^{-12} \text{ m}$ $\Delta P = ?$

$$\Delta x \Delta P_x = \frac{h}{2\pi}$$

$$\Delta P_x = \frac{h}{\Delta x 2\pi}$$

$$= \frac{6.626 \times 10^{-34}}{5 \times 10^{-12} \times 2\pi}$$

$$= 2.1091 \times 10^{-23} \text{ kg m/s}$$

Application of Heisenberg's Uncertainty principle

(*) Absence of free electrons.

$$E^2 = P^2 c^2 + m_0^2 c^4$$

$$\Delta x \Delta P_x = \frac{h}{2\pi}$$

$$\Delta P_x = \frac{h}{2\pi \Delta x} = \frac{6.626 \times 10^{-24}}{2\pi \times 1 \times 10^{-14}}$$

$$\Delta P_x = 1.054 \times 10^{-20} \text{ kg m s}^{-1}$$

$$E^2 = (1.054 \times 10^{-20} \times 3 \times 10^8)^2 + (9.1 \times 10^{-31})^2 (3 \times 10^8)^4$$

$$= 9.929 \times 10^{-24} \text{ joule}$$

$$= P$$

→ Absence of free electrons

According to theory of relativity energy of a particle is given by the relation

$$E^2 = P^2 c^2 + m_0^2 c^4$$

where P = momentum

m_0 = rest mass of the particle

According to Heisenberg's principle

$$\Delta x \Delta p_x = \frac{h}{2\pi}$$

The diameter of the nucleus is 10^{-14} m, so the maximum possibility of the particles is within its diameter thus the position of the particle is in 10^{-14} m.

$$\therefore \Delta x = 10^{-14} \text{ m}$$

$$\Delta x \Delta p_x = \frac{h}{2\pi}$$

$$\Delta p_x = \frac{h}{2\pi \Delta x} = \frac{6.63 \times 10^{-34}}{2 \times 3.14 \times 10^{-14}} = 1.05 \times 10^{-20} \text{ kg m/s}$$

For electron of minimum momentum, the minimum energy is given by

$$E_{\text{min}} = p_{\text{min}}^2 c^2 + m_0^2 c^4$$

$$= (1.055 \times 10^{-20} \times 3 \times 10^8)^2 + 9.1 \times 10^{-31} \times (3 \times 10^8)^4$$

$$= 3 \times 10^8 \sqrt{1.113 \times 10^{-40}}$$

$$= 3.1648 \times 10^{-12} \text{ J}$$

Converting into eV

$$\therefore E_{\text{min}} = \frac{3.1648 \times 10^{-12}}{1.6 \times 10^{-19}} \text{ eV} \approx 201 \text{ eV}$$

If free e^- exists the nucleus must have minimum energy about 201 eV. But the minimum required K.E which a β -particle, emitted from radioactive nucleus is at 4 MeV.

Quantum Mechanics

classical physics couldn't properly explain many physical phenomena, because it deals with microscope particles. Max plank in 1900, put forward the quantum theory to explain black body radiation.

Einstein introduced the idea of light quantum or photon. Particle nature of radiation was stressed in these theories.

But wave nature of radiation was essential to explain interference, diffraction etc. In 1924, Louis de Broglie suggested wave particle duality. In 1926, Schrodinger developed the wave particle mechanics. PAM Dirac unified wave mechanics and matrix mechanics to setup a general formulation called Quantum

mechanics. It deals with microscopic particles.

WAVE NATURE OF PARTICLES

In 1924, De-broglie predicted that like radiation, particle has a dual nature, particle and wave nature.

de-broglie hypothesis.

All moving particle is associated with a couple called matter wave or de-broglie wave and its wavelength is known as de-broglie wavelength which is given by,

$$\lambda = \frac{h}{p} \quad (1)$$

where $h \rightarrow$ planck's constant
 $6.626 \times 10^{-34} \text{ J s}$

$p \rightarrow$ momentum of the particle
 $= mv$

According to mass-energy relation

$$E = mc^2 \quad (1) \quad \text{particle nature}$$

we know the relation (wave-nature)

$$E = h\nu \quad (2)$$

equating (1) and (2)

$$mc^2 = h\nu$$

$$mc = \frac{h\nu}{c}$$

$$p = \frac{h\nu}{c}$$

substitute $\frac{\nu}{c} = \frac{1}{\lambda}$

$$p = \frac{h}{\lambda}$$

$$\lambda = \frac{h}{p}$$

but $mc = p$

we have,

$$v = \nu \lambda \quad \text{or} \quad c = \nu \lambda \quad p = \frac{h}{\lambda}$$

$$\therefore \frac{\nu}{c} = \frac{1}{\lambda}$$

$$\lambda = \frac{h}{p}$$

Que. calculate the wavelength of an electron accelerated by a potential difference of V volt.

ans Energy of electron

$$E = eV \quad (1)$$

where e = charge of e^-
 $= 1.6 \times 10^{-19} \text{ J}$

V = applied potential difference

we have $KE = \frac{1}{2} m v^2 \quad (2)$

$$\frac{1}{2} m v^2 = eV \quad (3)$$

$$v^2 = \frac{2eV}{m}$$

$$v = \sqrt{\frac{2eV}{m}}$$

$h \rightarrow$ Planck's constant
 $m \rightarrow$ mass of $e^- = 9.1 \times 10^{-31} \text{ kg}$
 $e \rightarrow$ charge of $e^- = 1.6 \times 10^{-19} \text{ C}$
 $V \rightarrow$ potential diff in volt.

Then momentum $P = mv$

$$P = m \sqrt{\frac{2eV}{m}} = \sqrt{\frac{m^2 \cdot 2eV}{m}} = \sqrt{2eVm}$$

$$\text{then } \lambda = \frac{h}{P} = \frac{h}{\sqrt{2meV}} \quad (4)$$

Que. Calculate the wavelength associated with an e^- under a potential difference of 100V.

ans. For an e^- , $\lambda = \frac{h}{\sqrt{2meV}}$

$$h = 6.625 \times 10^{-34} \text{ Js}$$

$$m = 9.1 \times 10^{-31} \text{ kg}$$

$$V = 100 \text{ V}$$

$$\text{then } \lambda = \frac{6.625 \times 10^{-34}}{\sqrt{2 \times 9.1 \times 10^{-31} \times 1.6 \times 10^{-19} \times 100}} = 1.2 \times 10^{-10} \text{ m}$$

Que. Estimate the de Broglie wavelength of an e^- moving with a K.E of 100 eV.

ans. we have, for an electron

$$KE = eV$$

$$\frac{1}{2} m v^2 = eV = 100 \text{ eV}$$

$$= 100 \times 1.6 \times 10^{-19} \text{ J}$$

$$\text{then } \lambda = \frac{h}{\sqrt{2meV}}$$

$$\lambda = \frac{6.625 \times 10^{-34}}{\sqrt{2 \times 9.1 \times 10^{-31} \times 1.6 \times 10^{-19} \times 100}}$$

$$\lambda = 1.2 \times 10^{-10} \text{ m}$$

(*) Calculate the de Broglie wavelength of whose KE is 10 keV.

ans. $KE = eV = 10 \text{ keV}$

$$= 10 \times 10^3 \times 1.6 \times 10^{-19} \text{ J}$$

$$\text{then } \lambda = \frac{h}{\sqrt{2meV}}$$

$$\lambda = \frac{6.625 \times 10^{-34}}{\sqrt{2 \times 9.1 \times 10^{-31} \times 10 \times 10^3 \times 1.6 \times 10^{-19}}}$$

$$\lambda = 1.22 \times 10^{-11} \text{ m}$$

UNCERTAINTY PRINCIPLE (Heisenberg's Uncertainty principle)

It is impossible to have an accurate measurement of two conjugate variables simultaneously. i.e.,

it is impossible to know both the exact position and exact momentum of an object at the same time.

Let the Uncertainty in position = Δx

Uncertainty in momentum = Δp_x

Then according to Heisenberg's Uncertainty principle

$$\Delta x \Delta p_x \geq \frac{h}{2} \quad \text{where } \hbar = \frac{h}{2\pi}$$

$$\text{or } \Delta x \Delta p_x \geq \hbar$$

Similarly Uncertainty in energy = ΔE

Uncertainty in time = Δt

then $\Delta E \Delta t \geq \frac{h}{2}$ or

$$\boxed{\Delta E \Delta t \geq \hbar}$$

Application of Uncertainty principle

Q. Absence of electron inside the nucleus

Let the nucleus of the order of 10^{-14} m .

ie, $\Delta x \approx 10^{-14} \text{ m}$

By uncertainty principle

$$\Delta x \cdot \Delta p_x \geq \hbar$$

$$\Delta x \cdot \Delta p_x = \hbar = \frac{h}{2\pi}$$

$$\text{then, } \Delta p_x = \frac{h}{2\pi \Delta x} = \frac{6.625 \times 10^{-34}}{2\pi \times 10^{-14}}$$

$$\Delta p_x = \underline{\underline{1.10 \times 10^{-20} \text{ kg m/s}}}$$

This momentum contributes to the necessary energy of the nucleus ie,

$$\text{energy of the nucleus} = 1.10 \times 10^{-20} \text{ J}$$

$$\text{energy of } e^- \approx 20 \text{ meV}$$

$$\approx 20 \times 10^6 \times 1.6 \times 10^{-19} \text{ J}$$

$$\approx \underline{\underline{8.2 \times 10^{-12} \text{ J}}}$$

→ energy of nucleus \neq energy of e^-

→ No electron can exist inside the nucleus.

ELECTROSTATICS

Magnetic field (B)

The force experienced by the magnet in its surroundings is known as magnetic field, it is represented as 'B'.

Applied current of magnetic field.

"current always conduct in closed loop"



Magnetic flux (Φ)

magnetic field per unit area is magnetic flux $\Phi = \frac{B}{A}$

Divergence (E), (∇)

* when density increases permittivity ↓.

$$E = \frac{\rho}{\epsilon_0} \quad \text{Coulomb Dynamics (E)}$$

$\rho \rightarrow$ density $\epsilon_0 \rightarrow$ permittivity in vacuum.

Magnetic flux Density.

It is the force acting per unit current, per unit length in a wire.

Magnetic flux formula.

(*) magnetic flux (surface area)

It is defined as magnetic field per unit area $\Phi_B = B \cdot A$

$$\Phi_B = B \cdot A \cos \theta$$

consider a small surface of area dA in an surface the flux through the surface is $\Phi_B = B \cdot dA$

∴ Total flux in an surface area is the sum of individual mag flux Φ_B

$$\text{i.e., } \Phi_B = B_1 \cdot dA_1 + B_2 \cdot dA_2 \dots$$

$$\int \Phi_B = \int B \cdot dA$$

$$d_B = B \cdot A$$

$$d_B = B \cdot A \cos \theta$$

Gauss Law in differential form.

$$\nabla \cdot B = 0 \quad \nabla \rightarrow \text{Divergence}$$

Curl's divergence.

What is Curl's divergence?


It is a theorem set which is related to the flux of a material in vector field through a closed surface area of the field in volume, and closed, enclosed.

(*) Gauss's Law

This law states that the amount of magnetic field lines passing through an closed surface area is zero. Because no of magnetic field lines entering inside the ^{Gaussian} surface is equal to the no of magnetic field lines goes outside.

$$\oint B \cdot ds = 0$$

$$\Phi_B = 0$$

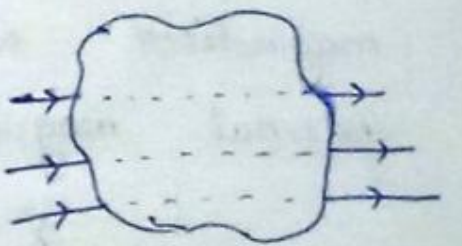


Ampere's Circuital Law.

The law states that the no of magnetic field lines in an longitudinal section is equal to the amount of current applied.

$$\oint B \cdot dl \propto I$$

$$\oint B \cdot dl = \mu_0 I$$



8.1 - 161

8.20 - 161

8. $\frac{dM}{dt}$



8. Faraday's law of magnetism
It states that the circulation of magnetic field is equal to the rate of change of magnetic flux. In the case of change of time

$$\oint \vec{B} \cdot d\vec{l} = \mu_0 \frac{d\Phi_B}{dt}$$

the rate of time

My magnetic permeability

The relative permeability is defined as the ratio of magnetic field inside a material to the magnetic field when it is applied.

Magnetic susceptibility χ_m

It is the measurement of how much a material can be magnetized when the time material is kept in the external magnetic field.

$$\chi_m = \frac{M}{H}$$

properties of magnetism

1. Ferromagnetism: It is the prop. of material which causes it to create a magnetic field in response to the external mag. field. The material shows positive dipole when magnetic field is applied along internal with each other and align them to the direction of external magnetic field.

→ paramagnetism: It is a property of a material which causes it to create the same direction external mag. field as external magnetic field.

→ ferromagnetism: A material permeated magnet with and in addition to the action of magnetic field and the more permeable region to strong.


Vector Calculus

(*) Basic principles of vector calculus

1. dot product - / scalar product

The dot product of two vectors is defined as the product of magnitudes and cosine angle b/w them.


$$\vec{a} \cdot \vec{b} = ab \cos \theta$$



2. Cross product / Vector product

The cross product of two vectors is defined as the product of magnitudes and sine angle b/w them.

$$\vec{a} \times \vec{b} = ab \sin \theta$$




Special Cases

If there are 3-vectors $(\vec{A}, \vec{B}, \vec{C})$ where \vec{C} is the resultant product of the vectors vector product of \vec{A} and \vec{B} .

$$\vec{C} = (\vec{A} \times \vec{B}) \times \vec{C}$$

$$\begin{vmatrix} \hat{i} & \hat{j} & \hat{k} \\ a_x & a_y & a_z \\ b_x & b_y & b_z \end{vmatrix}$$



∇ operators

$\nabla f \rightarrow$ gradient
 $\nabla \cdot \vec{a} \rightarrow$ divergence
 $\nabla \times \vec{a} \rightarrow$ curl

When the operator acts on a scalar quantity it instructs to differentiate the scalar quantity the operator of ∇ on a scalar quantity results in vector quantity.

$$\nabla = \frac{d}{dx} \hat{i} + \frac{d}{dy} \hat{j} + \frac{d}{dz} \hat{k}$$

Gradient :- A vector quantity applied on scalar quantity is,

$$\nabla = \frac{d}{dx} \hat{i} + \frac{d}{dy} \hat{j} + \frac{d}{dz} \hat{k}$$

If f is a scalar quantity $\nabla f = \frac{df}{dx} \hat{i} + \frac{df}{dy} \hat{j} + \frac{df}{dz} \hat{k}$

Qu. Find the gradient function of F at point 1, 2, 3

$$F = xy^2 + z^3y$$

$$\text{Ans } \nabla F = \frac{d(xy^2 + z^3y)}{dx} \hat{i} + \frac{d(xy^2 + z^3y)}{dy} \hat{j} + \frac{d(xy^2 + z^3y)}{dz} \hat{k}$$

$$= y^2 \hat{i} + 2xy \hat{j} + 3z^3 \hat{k}$$

$$= y^2 \hat{i} + 2xy \hat{j} + 3z^3 \hat{k}$$

$$= y^2 \hat{i} + 2xy \hat{j} + 3z^3 \hat{k}$$

$$\nabla F = y^2 \hat{i} + 2xy \hat{j} + 3z^3 \hat{k}$$

$$\text{at point } (1, 2, 3) = 2^2 \hat{i} + 2 \times 1 \times 2 \hat{j} + 3 \times 3^3 \hat{k}$$

$$= 4 \hat{i} + 4 \hat{j} + 81 \hat{k}$$

$$= 4 \hat{i} + 4 \hat{j} + 81 \hat{k}$$

Basics of Divergence

It is a scalar quantity

It is applied to the vector quantity

$$\nabla \cdot \vec{F} = \frac{dF_x}{dx} + \frac{dF_y}{dy} + \frac{dF_z}{dz}$$

Formula: This rule states that volume integral = Surface integral.

$$\vec{\nabla} \cdot \vec{F} \Delta V = \oint \vec{F} \cdot d\vec{s}$$

$$\vec{\nabla} \cdot \vec{F} \Delta V = \oint \vec{F} \cdot d\vec{s}$$

Ques Find the divergence of the function at the point (2,1)

$$\vec{F} = xy^2\hat{i} + y\hat{j} + xz\hat{k} \text{ (vector function)}$$

find $\nabla \cdot \vec{F}$

$$\Delta F = \frac{dF}{dx}\hat{i} + \frac{dF}{dy}\hat{j} + \frac{dF}{dz}\hat{k}$$

$$= y^2\hat{i} + \hat{j} + x\hat{k}$$

$$\text{at } (2,1) = \underline{4\hat{i} + \hat{j} + \hat{k}} = 4 + 1 + 1 = 6$$

Curl function

it is a vector quantity where it is applied to another vector quantity

$$\text{Curl of } \vec{F} = \nabla \times \vec{F}$$

$$\vec{F} = F_1\hat{i} + F_2\hat{j} + F_3\hat{k}$$

$$\nabla \times \vec{F} = \begin{vmatrix} \hat{i} & \hat{j} & \hat{k} \\ \frac{d}{dx} & \frac{d}{dy} & \frac{d}{dz} \\ F_1 & F_2 & F_3 \end{vmatrix}$$

$$\nabla \times \vec{F} = \lim_{\Delta S \rightarrow 0} \frac{\oint_{\Delta S} \vec{F} \cdot d\vec{l}}{\Delta S}$$

$$\Delta S \nabla \times \vec{F} = \lim_{\Delta S \rightarrow 0} \oint_{\Delta S} \vec{F} \cdot d\vec{l}$$

Surface area
Integral

Lineal
Integral

This is known as ~~Stokes~~ ^{Stokes} theorem

Ques Volume Integrals

It is a representation of vector point function and volume (V) enclosed by a closed surface. S

Ques Find the volume integral of $F = 2x^2 - x\hat{j} + y\hat{k}$, given boundary surface

$$(x=0, x=2, y=0, y=4, z=0, z=2)$$

$$z=0, z=2$$

$$z=0, z=2$$

Ans. Solution $\iiint_V r \cdot dV \quad dx, dy, dz$

$$\int_0^2 \int_0^4 \int_0^2 [2x^2 - x\hat{j} + y\hat{k}] dx dy dz$$

$$\int_0^2 \int_0^4 \left[\frac{2x^3}{3} - x\hat{j} + y\hat{k} \right]_0^2 dy dz$$

$$= \int_0^2 \left[\int_0^4 \left(\frac{2x^3}{3} - x\hat{j} + y\hat{k} \right) dy \right] dx$$

$$= \int_0^2 \left[\left(\frac{2x^3}{3} \right) \frac{y^2}{2} - x\hat{j}y + y^2\hat{k} \right]_0^4 dx$$

$$= \int_0^2 \left[\left(\frac{2x^3}{3} \right) \frac{16}{2} + \frac{y^2\hat{k}}{2} - x\hat{j} \right] dx$$

$$= \int_0^2 \left[\frac{2x^3}{3} \cdot 8 + \frac{y^2\hat{k}}{2} - x\hat{j} \right] dx$$

$$= \frac{16}{3} \left[\frac{2x^4}{4} - \frac{x^2}{2} \right]_0^2 + \left[\frac{y^2\hat{k}}{2} - 0 \right]_0^2$$

$$= \frac{16}{3} \left[\frac{2 \cdot 16}{4} - \frac{4}{2} \right] + \left[\frac{4\hat{k}}{2} - 0 \right]$$

$$= \frac{16}{3} [8 - 2] + 2\hat{k} = \frac{16}{3} \cdot 6 + 2\hat{k} = 32 + 2\hat{k}$$

SEMICONDUCTOR

8 part SA
define, peculiarity, Appli

Super Conductivity & Conductors:

materials having zero resistance = super conductor.

The phenomena exactly zero resistance in a material is known as super conductive material.

(*) Critical temperature: for a normal conductor, resistance is function of temperature therefore $R = f(T)$ (As temp increase resistance also increase)
The temp at which resistance turns to zero ^(infinite conductivity) is called critical temp/transition temperature.
Case-1

When temp decreases the resistance of material is lower down (non-zero) and infinite conductivity. Such materials are known as super conductors.

(*) Above the critical temp the material will be in normal state. Super conductivity is in reversible process so when temp is increased from the critical temp hence the resistivity also increases. Thus it is known as reversible process.

Meissner's Effect

The phenomena of expulsion of magnetic field lines from superconductors is known as Meissner's effect.

$$B = \mu_0 (H + M)$$

Taking H outside

$$B = \mu_0 H \left(1 + \frac{M}{H} \right) \quad \text{--- (2)}$$


We know that $\frac{M}{H} = \chi$ apply in eqn (2)

$$0 = \mu_0 H \left(1 + \frac{M}{H} \right)$$

$$1 + \chi = 0$$


$$\chi = -1$$

for diamagnetic material.

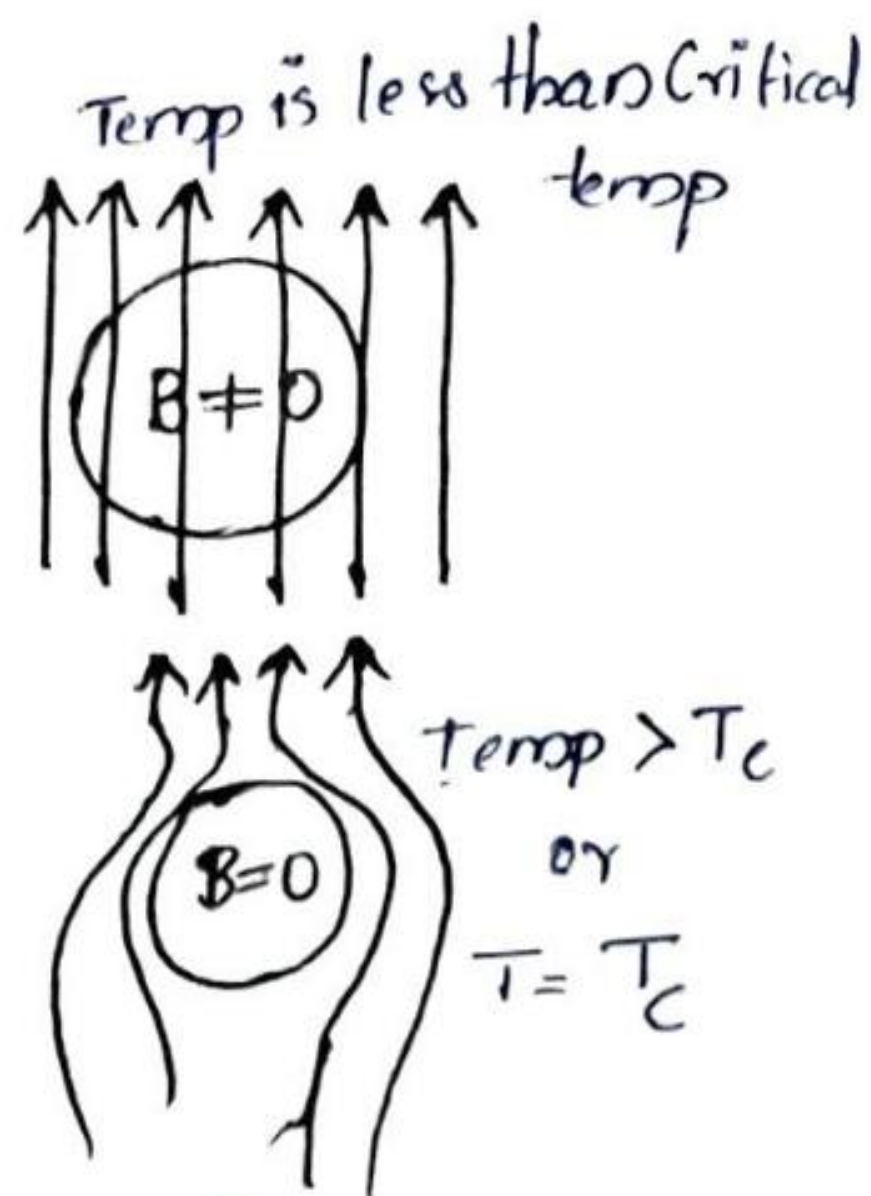


Type-1 Superconductors	TYPE-2 Superconductors.
(*) The material loses its magnetisation after	(*) it loses its magnetisation gradually.
(*) It exhibits complete Meissner effect	(*) It doesn't exhibit Meissner effect.
(*) It exhibits only one critical magnetic field.	(*) It is not mixed exhibits diff critical magnetic field.
(*) It is not mixed state	(*) It is mixed state.
(*) They are called soft superconductors	(*) They are hard superconductors.
(*) eg:- Aluminium (Al), Indium (In), Tin (Sn), Lead (Pb)	(*) eg:- Germanium (Ge), Niobium (Nb), Vanadium (V)

Graphical representation Type 1 and Type 2 Superconductors

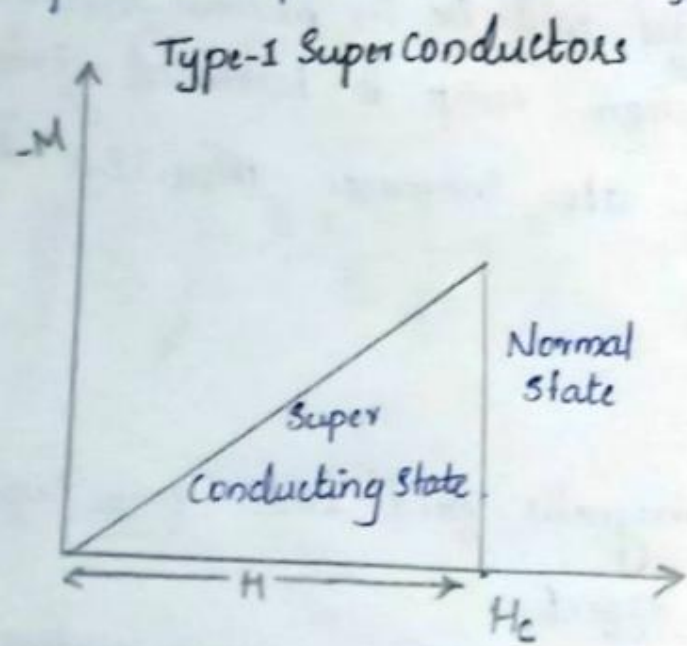

$H_c \rightarrow$ Critical mag
 $M \rightarrow$ magnetising field

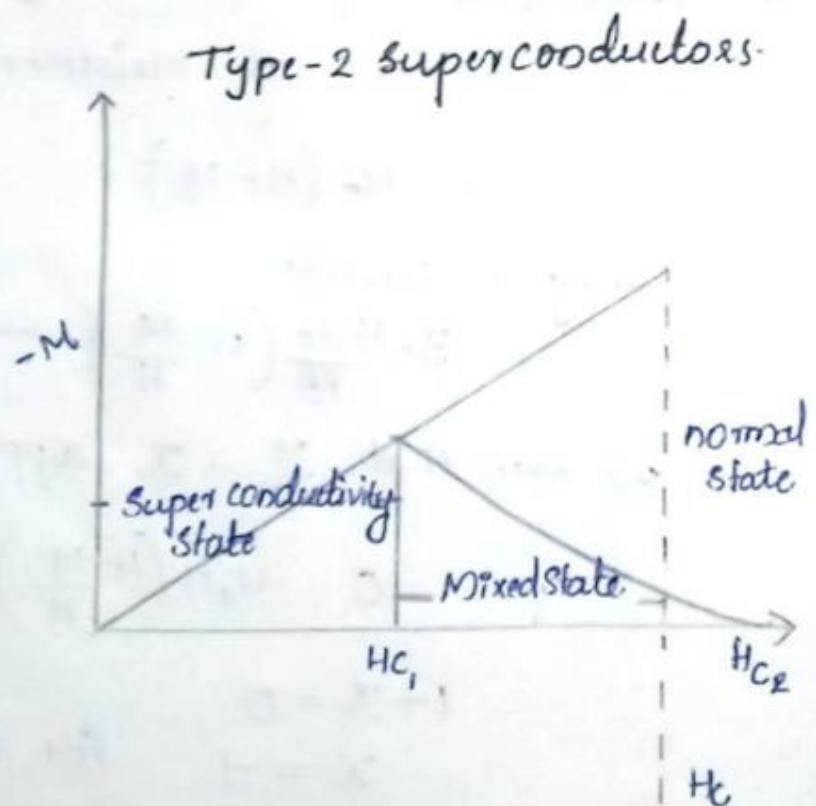


Numerical Aperture

- (*) In optics numerical aperture is defined as non-dimensional number that characterises the range of angles over which the system can accept or emit light.
- (*) It is the relation b/w acceptance angle and refractive index of 3 media involved, core, cladding, air. The light ray is incident on the fibre core. cent. (centre of the fibre) at an angle θ_1 , which is less than the acceptance angle of the fibre. The ray enters from the air medium (refractive index n_0) and the fibre for refractive index (n_1) which is slightly greater than cladding refractive index (n_2). The ray is normal to the axis, by consider the refraction of air-core by using (Snell's law)

$$\frac{\sin i}{\sin r} = \frac{n_2}{n_1}$$

$$n_1 \sin i = n_2 \sin r$$

$$n_0 \sin \theta_1 = n_1 \sin \theta_2$$

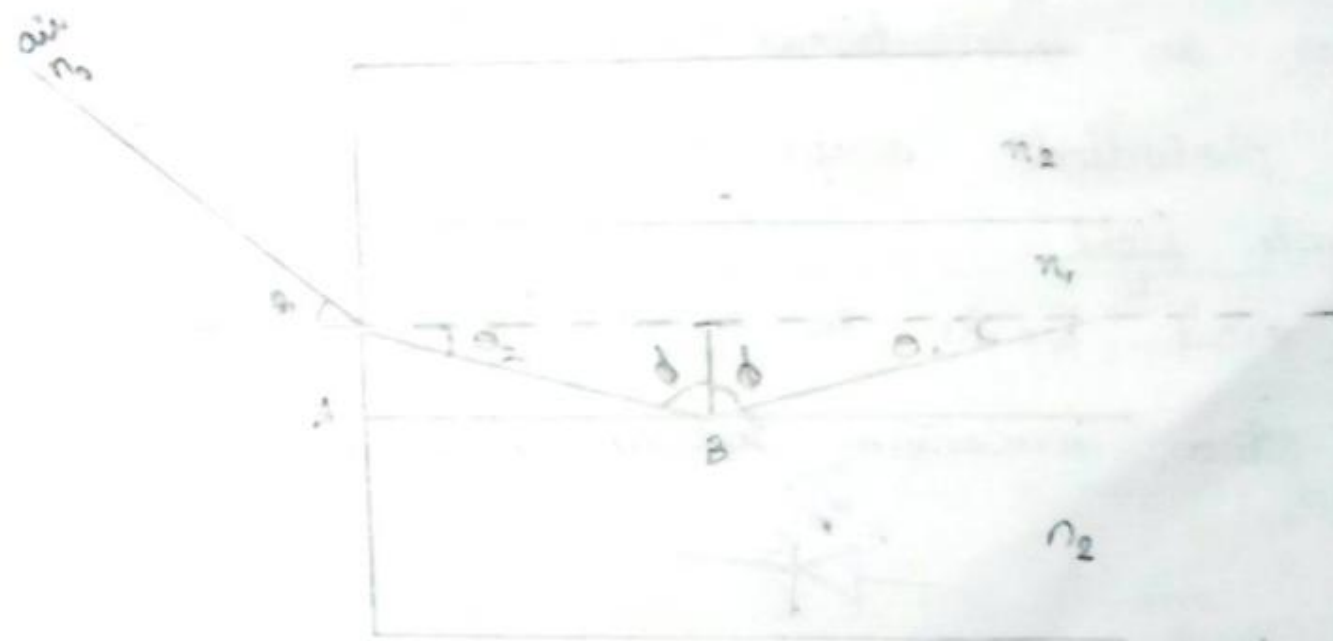

LED

A p-n junction diode which operates as forward biased the e^- from the n-region and goes from p-region meet at the junction formed as depletion region this e^- recombine with holes in this region. Just formation of e^- from the conduction band to the empty state of valence band and it releases photon.

$$E_g = \frac{hc}{\lambda}$$

PHOTO DIODE: The diode which produce current when light falls on it.

- (1) It is a light sensitive device which converts light energy \rightarrow electrical energy.
- (2) It is a p-n junction diode where n and p and it is made an interstitial layer called depletion layer.
- (3) The photodiode accept the light as an input device to generate light.
- (4) The diode works in reverse biased condition.
- (5) eg: Silicon, Germanium, Selenium, Gallium.



Applications: Laser, sensors.

BCS Theorem (Cooper pair)

It was developed by Bardeen and Cooper and Schrieffer and this theorem is based on super pair e^- .



Consider an e^- moving in a lattice. The other ions are attracted towards the e^- due to electrostatic force as the positive charge is positive and this type of interaction is known as e^- -phonon interaction. Now the region of increased charge density attracts another e^- and eventually attract e^- pair (e^- pair) this e^- pair tends to interact like it's two lattice. The interaction between e^- and e^- happens in opposite side like they attract each other to form the pair, this process is known as Cooper pair.

Condition

As temperature decreases below T_c temperature the low pair decreases and high temp can destroy Cooper pair.

HCBM High Temperature Super Conductor Material (HTSC)

Applications of Super Conductivity

Magnetic, laser technology, medical (MRI)

Fiber Optics

Optical fiber cable



• It is low loss and total internal reflection.

$$\frac{\sin i}{\sin r} = \frac{n_2}{n_1} \text{ Snell's law}$$

• The angle of incidence is greater than critical angle.

∴ critical angle formula $\frac{\sin \theta_c}{\sin 90^\circ} = \frac{n_2}{n_1}$

$$\sin \theta_c = \frac{n_2}{n_1}$$

$$\theta_c = \sin^{-1}\left(\frac{n_2}{n_1}\right)$$

Step Index Fibre and Graded Index Fibre

Step Index Fibre	Graded Index Fibre
It has const refractive index	Refractive index reduces gradually
refractive index reduces from n_1 to n_2 suddenly	And for cladding core boundary the difference of refractive index is small.
Signals can be trans	
long distance transmission of light	Short distance transmission of rays.
zig-zag path is followed by light ray.	Spherical or helical path is followed by light ray.

Accental Centre and Numerical apperture.

Stability and gathering of light is termed numerical apperture.

$$NA = \sin^{-1} \sqrt{\mu_1^2 - \mu_2^2}$$

$$\frac{\sin i}{\sin(90-0)} = \frac{n_2}{n_1}$$

$$\frac{\sin i}{\cos \theta} = \frac{n_2}{n_1}$$

Let $n = \mu$... $\frac{\sin i}{\cos \theta} = \frac{\mu_2}{\mu_1}$

$$\frac{\sin \theta}{\cos \theta} = \frac{\mu_2}{\mu_1} \quad \text{Where } \mu_2 \rightarrow \text{angle of refractive index of 2nd medium}$$

$$\tan \theta = \frac{\mu_2}{\mu_1}$$

if $\mu_1 = 1$ $\frac{\sin \theta}{\cos \theta} = \mu_2$ $\begin{matrix} i \rightarrow \\ 0 \rightarrow \end{matrix}$

$$\sin \theta = \mu_2 \cos \theta \rightarrow \mu_2 = \mu_1 \cos \theta$$

if $\mu_2 = \mu_1$, replacing μ_2 as μ_1 the above equation

$$\sin \theta = \mu_1 \cos \theta \quad (2)$$

by apply snells law

$$\frac{\sin \theta}{\sin 90^\circ} = \frac{\mu_2}{\mu_1}$$

$$\sin \theta = \frac{\mu_2}{\mu_1} \quad \theta = \sin^{-1}\left(\frac{\mu_2}{\mu_1}\right)$$

$$\mu_2 = \mu_1 \sin \theta$$

$$\sin^2 \theta + \cos^2 \theta = 1$$

$$\cos \theta = \sqrt{1 - \sin^2 \theta}$$

$$\cos \theta = \sqrt{1 - \left(\frac{\mu_2}{\mu_1}\right)^2}$$

$$\sin \theta = \mu_1 \cos \theta$$

$$\sin \theta = \mu_1 \sqrt{1 - \frac{\mu_2^2}{\mu_1^2}}$$

$$\sin \theta = \frac{\mu_1}{\mu_1} \sqrt{\mu_1^2 - \mu_2^2}$$

$$\theta = \sin^{-1} \sqrt{\mu_1^2 - \mu_2^2}$$

Or

$$NA = \sin^{-1} \sqrt{\mu_1^2 - \mu_2^2}$$

$$\oint_V \rho dv = \epsilon_0 \oint_S \vec{E} \cdot d\vec{s}$$

$$D = \epsilon_0 \vec{E}$$

$$\oint_S D \cdot d\vec{s} = \int_V \rho dv$$

electric flux divergence in Maxwell equation

electric displacement vector in free space by using Gauss divergent theorem.

$$\oint_S D \cdot d\vec{s} = \int_V (\nabla \cdot \vec{D}) dv$$

$$\int_V \rho dv = \int_V (\nabla \cdot \vec{D}) dv$$

$$\rho dv = \nabla \cdot \vec{D} dv$$

$$\int_V (\nabla \cdot \vec{D} - \rho) dv = 0$$

$$\text{div } \vec{D} = \rho$$

$$\nabla \cdot \vec{D} = \rho$$

$$d\vec{E} = \frac{\rho}{\epsilon_0} d\vec{s}$$

$$d\vec{E} = \vec{E} \cdot d\vec{s}$$

$$\rho = \rho / dv$$

$$\frac{\rho}{\epsilon_0} \int_V dv = \vec{E} \cdot d\vec{s}$$

$$\rho \int_V dv = \epsilon_0 \vec{E} \cdot d\vec{s}$$

$$D = \epsilon_0 \vec{E}$$

$$\rho \int_V dv = \epsilon_0 \vec{E} \cdot d\vec{s}$$

$$\rho \int_V dv = \epsilon_0 \vec{E} \cdot d\vec{s}$$

$$\rho \int_V dv = \epsilon_0 \vec{E} \cdot d\vec{s}$$

$$\rho \int_V dv = \epsilon_0 \vec{E} \cdot d\vec{s}$$

$$\rho \int_V dv = \epsilon_0 \vec{E} \cdot d\vec{s}$$

$$\rho \int_V dv = \epsilon_0 \vec{E} \cdot d\vec{s}$$

$$\rho \int_V dv = \epsilon_0 \vec{E} \cdot d\vec{s}$$

$$\rho \int_V dv = \epsilon_0 \vec{E} \cdot d\vec{s}$$

$$\rho \int_V dv = \epsilon_0 \vec{E} \cdot d\vec{s}$$

$$\rho \int_V dv = \epsilon_0 \vec{E} \cdot d\vec{s}$$

$$\rho \int_V dv = \epsilon_0 \vec{E} \cdot d\vec{s}$$

$$\rho \int_V dv = \epsilon_0 \vec{E} \cdot d\vec{s}$$

$$\rho \int_V dv = \epsilon_0 \vec{E} \cdot d\vec{s}$$

$$\rho \int_V dv = \epsilon_0 \vec{E} \cdot d\vec{s}$$

$$\rho \int_V dv = \epsilon_0 \vec{E} \cdot d\vec{s}$$

$$\rho \int_V dv = \epsilon_0 \vec{E} \cdot d\vec{s}$$

$$\rho \int_V dv = \epsilon_0 \vec{E} \cdot d\vec{s}$$

$$\rho \int_V dv = \epsilon_0 \vec{E} \cdot d\vec{s}$$

$$\rho \int_V dv = \epsilon_0 \vec{E} \cdot d\vec{s}$$

$$\rho \int_V dv = \epsilon_0 \vec{E} \cdot d\vec{s}$$

$$\rho \int_V dv = \epsilon_0 \vec{E} \cdot d\vec{s}$$

$$\rho \int_V dv = \epsilon_0 \vec{E} \cdot d\vec{s}$$

$$\rho \int_V dv = \epsilon_0 \vec{E} \cdot d\vec{s}$$

$$\rho \int_V dv = \epsilon_0 \vec{E} \cdot d\vec{s}$$

$$\rho \int_V dv = \epsilon_0 \vec{E} \cdot d\vec{s}$$

$$\rho \int_V dv = \epsilon_0 \vec{E} \cdot d\vec{s}$$

$$\rho \int_V dv = \epsilon_0 \vec{E} \cdot d\vec{s}$$

$$\rho \int_V dv = \epsilon_0 \vec{E} \cdot d\vec{s}$$

$$\rho \int_V dv = \epsilon_0 \vec{E} \cdot d\vec{s}$$

$$\rho \int_V dv = \epsilon_0 \vec{E} \cdot d\vec{s}$$

$$\rho \int_V dv = \epsilon_0 \vec{E} \cdot d\vec{s}$$

$$\rho \int_V dv = \epsilon_0 \vec{E} \cdot d\vec{s}$$

$$\rho \int_V dv = \epsilon_0 \vec{E} \cdot d\vec{s}$$

$$\rho \int_V dv = \epsilon_0 \vec{E} \cdot d\vec{s}$$

$$\rho \int_V dv = \epsilon_0 \vec{E} \cdot d\vec{s}$$

$$\rho \int_V dv = \epsilon_0 \vec{E} \cdot d\vec{s}$$

$$\rho \int_V dv = \epsilon_0 \vec{E} \cdot d\vec{s}$$

$$\rho \int_V dv = \epsilon_0 \vec{E} \cdot d\vec{s}$$

$$\rho \int_V dv = \epsilon_0 \vec{E} \cdot d\vec{s}$$

$$\rho \int_V dv = \epsilon_0 \vec{E} \cdot d\vec{s}$$

$$\rho \int_V dv = \epsilon_0 \vec{E} \cdot d\vec{s}$$

$$\rho \int_V dv = \epsilon_0 \vec{E} \cdot d\vec{s}$$

Assignment

Time independent EQUATION

MAXWELL'S CURL

According to Faraday's law of magnetism $e = -\frac{d\phi}{dt}$ — (1)

$$e = \int \vec{E} \cdot d\vec{l} \quad \text{--- (2)}$$

$$\phi = \int \vec{B} \cdot d\vec{s} \quad \text{--- (2)}$$

sub eqn (2) in (1)

$$-\frac{d\phi}{dt} = \int \vec{E} \cdot d\vec{l}$$

$$e = -\frac{d}{dt} \left(\int \vec{B} \cdot d\vec{s} \right)$$

From eqn (2) and (3)

$$\int \vec{E} \cdot d\vec{l} = \int \text{curl } \vec{E} \cdot d\vec{s}$$

$$\text{so, } \int \text{curl } \vec{E} \cdot d\vec{s} = \int \frac{d}{dt} (\vec{B} \cdot d\vec{s}) = 0$$

$$\int \left[\text{curl } \vec{E} \cdot d\vec{s} + \frac{d}{dt} (\vec{B} \cdot d\vec{s}) \right] = 0$$

take 'ds' commonly outside

$$\int \left[\text{curl } \vec{E} + \frac{d\vec{B}}{dt} \right] \cdot d\vec{s} = 0$$

$$\text{curl } \vec{E} = -\frac{d\vec{B}}{dt}$$

→ s is the arbitrary, equation is valid when integration is zero

$$\text{or } \nabla \times \vec{E} = -\frac{d\vec{B}}{dt}$$

2) By Gauss Law in Magnetism the net mag flux emerging out of a enclosed surface area is equal to zero

$$\text{Integral of } \int \vec{B} \cdot d\vec{s} = 0$$

$$\int_S \vec{B} \cdot d\vec{s} = \int_V \text{div } \vec{B} dv$$

$$\int_S \vec{B} \cdot d\vec{s} = \nabla \cdot \vec{B}$$

$$\text{So, } \nabla \cdot \vec{B} = 0$$

According to Ampere's circuital law

$$\oint \vec{B} \cdot d\vec{l} = \mu_0 I$$

where $I = \int \vec{j} \cdot d\vec{l}$

$$\oint \vec{B} \cdot d\vec{l} = \mu_0 \int \vec{j} \cdot d\vec{l}$$

$$\oint \vec{B} \cdot d\vec{l} = \mu_0 I \quad \text{--- (1)}$$

$$\text{Current through density } \vec{j} = \int \vec{j} \cdot d\vec{l} \quad \text{--- (2)}$$

$$\oint \vec{B} \cdot d\vec{l} = \int \vec{j} \cdot d\vec{l}$$

By using Stokes theorem

$$\oint \vec{B} \cdot d\vec{l} = \int \text{curl } \vec{B} \cdot d\vec{s}$$

$$\text{curl } \vec{B} = \mu_0 \vec{j}$$

$$\text{curl } \vec{B} = \mu_0 \vec{j} \quad \text{--- (3)}$$

By equation of continuity

$$\text{div } \vec{j} + \frac{d\rho}{dt} = 0$$

$$\text{div } \vec{j} = -\frac{d\rho}{dt}$$

$$\text{curl } (\text{curl } \vec{B}) = \text{curl } \vec{j} \quad \text{--- (4)}$$

$$\text{curl } (\text{curl } \vec{B}) = \text{curl } \vec{j}$$

$$\text{curl } (\text{curl } \vec{B}) = \text{curl } \vec{j}$$

while introducing a new term \vec{E} in the modified equation (4)

$$\text{curl } \vec{E} = -\dot{\vec{B}} \quad \text{--- (5)}$$

\vec{E} is introduced by Maxwell and known as displacement

current density

$$\text{curl } \vec{E} = -\dot{\vec{B}} \quad \text{--- (5)}$$

$$\text{curl } (\text{curl } \vec{E}) = \text{curl } (-\dot{\vec{B}})$$

$$\text{curl } (\text{curl } \vec{E}) = -\text{curl } \dot{\vec{B}} \quad \text{--- (6)}$$

from Maxwell's 1st equation

$$\text{curl } \vec{E} = -\dot{\vec{B}}$$

By 2nd eqn of Maxwell

$$\text{curl } \vec{E} = -\dot{\vec{B}}$$

$$\text{curl } (\text{curl } \vec{E}) = -\text{curl } \dot{\vec{B}} \quad \text{--- (7)}$$

$$\text{curl } (\text{curl } \vec{E}) = -\text{curl } \dot{\vec{B}} \quad \text{--- (8)}$$

$$\text{curl } (\text{curl } \vec{E}) = -\text{curl } \dot{\vec{B}} \quad \text{--- (9)}$$

$$\text{curl } \vec{E} = -\dot{\vec{B}}$$

$$\text{curl } \vec{E} = -\dot{\vec{B}}$$

Conduction current: movement of charges in a conductor when a field is applied. By Ohm's law $\vec{j} = \sigma \vec{E}$ and $\vec{E} = \frac{\rho}{\epsilon_0}$

The condition of conductor is $\rho = 0$

$$\vec{E} = \frac{\rho}{\epsilon_0}$$

$$\vec{j} = \sigma \vec{E}$$

$$\vec{j} = \sigma \frac{\rho}{\epsilon_0}$$

Displacement Current

A time varying \vec{E} field is considered as an equivalent of \vec{j} which with \vec{j} and \vec{E} and \vec{B} and \vec{H}

$$\vec{j} = \sigma \vec{E}$$

Displacement current

2

displacement current $I_d = A \frac{dQ}{dt}$ $D \rightarrow \epsilon_0 E$
 displacement current density, $J_d = \frac{dQ}{dt}$

connection of displacement current with conduction current
 displacement current is the current i.e., set up in a dielectric medium due to variation of induced displacement of charge.

$I_c = \frac{V}{R}$ $Q = CV$

$T = \frac{Q}{t}$

$\therefore I_d = \frac{dQ}{dt} = \frac{d(CV)}{dt}$

$I_d = C \frac{dV}{dt}$

$j = I/A$ current charge density = j

$\therefore J_c = I_c/A = \sigma E$


$E = \frac{V}{d}$ $C = \frac{\epsilon_0 A}{d}$ $D = \epsilon_0 E$

$J_d = \frac{I_d}{A} = \frac{C}{A} \frac{dV}{dt} = \frac{\epsilon_0 A}{dA} \frac{dV}{dt} = \frac{\epsilon_0 V}{d} = \frac{\epsilon_0 Ed}{d} = \epsilon_0 \frac{dE}{dt}$

$J_D = \epsilon_0 E$

$J_d = \frac{dD}{dt}$ $J_c = \frac{I_c}{A} = \sigma E$

Total = $J_c + J_d$
 (Current charge density)

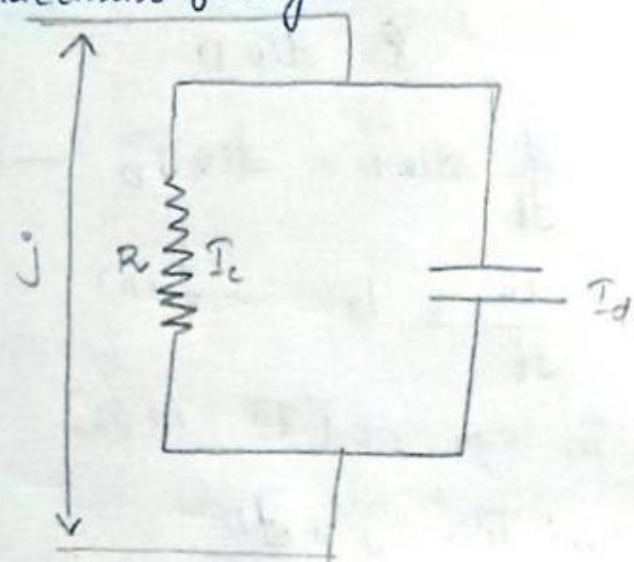

Velocity of EM-wave In Free Space.

Assume according to Maxwell's assumption the velocity of EM waves in free space is,

$V = \frac{1}{\sqrt{\mu_0 \epsilon_0}}$ — (1)

proof :- Maxwell's equation assumes the simpler form.

$\text{div } \vec{D} = 0$ — (2)

There is no free charge

$\text{div } \vec{B} = 0$ — (3)

$\text{curl } \vec{E} = - \text{curl } \frac{d\vec{B}}{dt}$ — (4)

$\text{curl } \vec{H} = \frac{d\vec{B}}{dt}$ — (5)

$J = 0$ there is no conduction current

multiply eqn (4) by curl

$\text{curl}(\text{curl } \vec{E}) = \text{curl} \frac{d\vec{B}}{dt}$ — (6) $(B = \mu H)$

$\text{curl}(\text{curl } \vec{E}) = \text{curl} \frac{d\mu \vec{H}}{dt}$

$= - \text{curl} \frac{d\mu \vec{H}}{dt}$

$= -\mu \frac{d}{dt} \text{curl } \vec{H}$

$= -\mu \frac{d\vec{B}}{dt} \times \frac{dD}{dt}$

$= -\mu \frac{d}{dt} \times \frac{d\epsilon_0 E}{dt}$

$= -\mu \epsilon_0 \frac{d}{dt} \left(\frac{dE}{dt} \right)$

double differentiation

$= -\mu \frac{d^2}{dt^2} (E)$

$$= -\mu\epsilon \frac{d^2 E}{dt^2} \quad \text{--- (6)}$$

$$\text{curl}(\text{curl } E) = -\mu\epsilon \frac{d^2 E}{dt^2} \quad \text{grad + gradient}$$

$$\text{curl}(\text{curl } E) = \text{gradient}(\text{div } E) - \nabla^2 E$$

$$\text{div } \vec{D} = 0 \quad \therefore \text{div } \vec{E} = 0$$

$$\text{curl curl } E = -\nabla^2 E \quad \text{--- (7)}$$

$$-\mu\epsilon \frac{d^2 E}{dt^2} = -\nabla^2 E \quad \text{--- (8)}$$

$$\mu\epsilon \frac{d^2 E}{dt^2} = \nabla^2 E$$

Eqn no (8) is well known as differential eqn

This shows that \vec{E} is propagated as a wave with
therefore the above eqn is simplified in the form of

$$\nabla^2 = \frac{1}{\mu\epsilon}$$

$$\nabla^2 H = \mu_0 \epsilon_0 \frac{d^2 H}{dt^2}$$

$\mu = \frac{1}{\sqrt{\mu_0 \epsilon_0}}$ This is the velocity of EM waves velocity is

$$\mu = \left(\frac{1}{9 \times 10^{12} \times \frac{4\pi}{10}} \right)^{1/2} = 2.997 \times 10^8 \text{ m/s}$$

Poynting's theorem

The rate of energy transfer (or product) from a region of space equals
to the rate of work done on a charge distribution + energy
flux leaving that region.

$$-\frac{d\psi}{dt} = \oint \nabla \cdot \vec{E} + \int \vec{J} \cdot \vec{E}$$

Maxwell's Equations (4 equations)

Gradient, divergence, curl, Gauss divergence theorem, Stokes' theorem,
Theorem and its proofs

Test :- Maxwell's Equations (4 equations)